



INNOVATION
FOR LIFE

PURE

LIGHTING

PRODUCT
CATALOGUE



CELEBRATING
10 YEARS



INNOVATION FOR LIFE

All images and information in this publication are intended as a guide to the actual product. Specifications may vary from time to time as products improve so please check with your PURE Sales Representative for up to date spec sheets and availability.

Variations of certain products will result in longer lead times.

Information is subject to change without notification at the discretion of PURE Lighting.

PURE

INNOVATION FOR LIFE



PURE LIGHTING

MARTEC®

HAVIT Lighting

LEGACY LIGHTING

Founded in 2013, PURE Lighting (Pure LED) is a 100% New Zealand owned and operated company. With an extensive background in the New Zealand electrical industry, our objective is to serve the growing need for energy-efficient sustainable lighting and smart solutions.

We deliver high quality products and optimum service, tailored specifically to meet our customers' needs. We lead the lighting industry in product innovation and smart technology.

PRODUCT RANGE

We have a broad product range including: domestic, commercial, industrial and sports lighting. PURE Lighting products are manufactured to specifications that meet AS/NZS standards. We are distributors for Havit Lighting, Martec and Legacy Lighting.

Havit Lighting is a premium range delivering high performance and quality. There are over 2000 products in this range including: LED strip, aluminium profile, track lighting, downlights, garden lights, in-ground lights and many more. These products are suitable for any size installation.

Martec Australia's range includes lighting, ceiling fans, bathroom heaters, exhaust fans and accessories. Martec (Tradetec) has been a very popular brand in New Zealand for over 7 years and enjoys an excellent reputation for quality.

Legacy Lighting, designed and manufactured in Australia, specialises in high quality LED floodlighting solutions for large area lighting applications.

LIGHTING DESIGN

When choosing light fittings it is not only the visual appearance that matters, but the light effects they create. Well-designed lighting can enhance all aspects of the human experience. In addition to providing an understanding of form, space and material it also affects our senses, our emotions, our health and well-being.

We provide creative, energy-efficient lighting solutions for all types of projects. Our well-planned lighting schemes are fully integrated with the environment, providing visual comfort and are adapted to the needs of the end-user based on ambience, accent and tasks.



INNOVATION
FOR LIFE



CONTENTS

DOWNLIGHTS

PURE Platinum Range.....	9
PURE Eco Range	11
Discus.....	15
Blitz II Range.....	16
Titan II Range.....	17
Arte Range	18

OYSTER LIGHTS

PURE Ceiling Light Range	21
Orbit Range.....	22

RESIDENTIAL LIGHTING

PURE Pillar & Bollard Range	25
PURE Wall Light Range.....	26
PURE Track Light Range.....	30
PURE Pendant Lights	33
PURE Mirror Lights	34
PURE Reading Lights.....	35
PURE Wireless Switches.....	36

EXTERIOR SPOTLIGHTS

PURE Spotlight Range.....	39
---------------------------	----

BATTEN LIGHTS & UNDERVERANDAHS

PURE Eco Range Batten Lights	44
PURE Elite Batten Lights.....	45
PURE Slimline Batten Lights.....	46
PURE Underverandahs	47

PANEL LIGHTS

PURE Panel Range.....	48
-----------------------	----

FLOODLIGHTS

PURE Slimline Floodlights.....	54
PURE Eco Range Floodlights	56

SPORTS FLOODLIGHTS

Invictus II Range	58
PURE Eco Range Sports Floodlights.....	60
PURE Platinum Range Sports Floodlights	62
PURE Sports Court Lights	64

STREET LIGHTS

PURE Eco Range Street Lights	66
PURE Platinum Range Street Lights.....	68

LIGHT POLES

PURE Light Poles	70
------------------------	----

HIGH BAY LIGHTS

PURE High Bay Range	73
PURE Eco Range High Bay	75
PURE Platinum Range Linear High Bay.....	76
PURE Linear High Bay	77

CANOPY LIGHTS

PURE Canopy Light	78
-------------------------	----

EMERGENCY LIGHTING

PURE Emergency Range Exit Lights	81
PURE Emergency Range Emergency Lights.....	84
PURE Emergency Batten.....	87
PURE Emergency High Bay Driver	88

CEILING FANS

Link Range AC Ceiling Fan.....	91
Link Range DC Ceiling Fan	93





DOWNLIGHTS

LED downlights have become increasingly popular due to their energy efficiency and long lifespan. They are also available in a range of colour temperatures, from warm white to cool daylight, to suit a variety of preferences.

Overall, downlights are a versatile and effective lighting solution that can enhance the look and functionality of any space.

PURE Platinum Range	9
PURE Eco Range	11
Discus	15
Blitz II Range	16
Titan II Range	17
Arte Range.....	18




PURE PLATINUM RANGE


Tricolour CCT LED Downlights



8W Platinum Downlight
Flush Diffuser
PLP8WDA

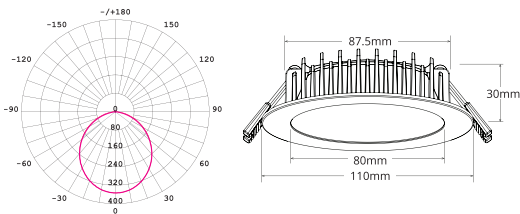

8W Platinum Downlight
Recessed Diffuser
PLP8WDB

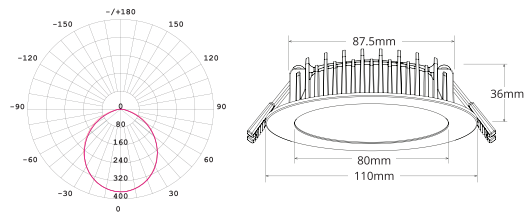

PRODUCT FEATURES

- Recessed or flush low glare diffuser options
- Plastic coated aluminium housing with external driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable
- Quick connect installation



QUICK CONNECT
for hardwire
installation

TECHNICAL SPECIFICATIONS

PRODUCT	Flush Diffuser	Recessed Diffuser	IK RATING	-
ORDERING CODE	PLP8WDA	PLP8WDB	BEAM ANGLE	100°
POWER	8W		DIMMING	Triac Dimming
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	800-920lm	780-910lm	LED TYPE	SMD
CUTOUT	Ø90mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP54 (front) IP20 (back)			



Class II



Dimmable



IC Rating



Tricolour



Warranty



IP Rating





Lifespan

PURE PLATINUM RANGE

Tricolour CCT Gimbal LED Downlights



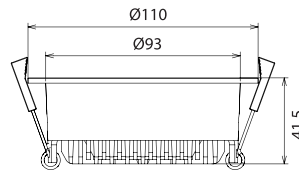


13W Gimbal Downlight
PLE13WG



PRODUCT FEATURES

- 25° tilt
- Plastic coated aluminium housing with external driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable

TECHNICAL SPECIFICATIONS

PRODUCT	Pure ECO Gimbal Downlight	IK RATING	-
ORDERING CODE	PLE13WG	BEAM ANGLE	90°
POWER	13W	DIMMING	Triac Dimming
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K	POWER FACTOR	0.9
LUMEN OUTPUT	760-900lm	LED TYPE	SMD
CUTOUT	Ø95-100mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80	CERTIFICATIONS	  
IP RATING	IP20 (front) IP20 (back)		




PURE ECO RANGE

Tricolour CCT Gimbal LED Downlights



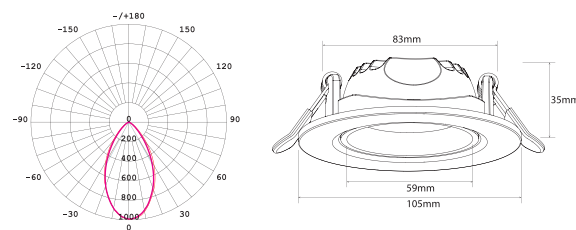


**9W Gimbal Downlight
PLP9WG**



PRODUCT FEATURES

- 25° tilt
- Plastic coated aluminium housing with external driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable
- Flex and plug

TECHNICAL SPECIFICATIONS

PRODUCT	PURE Platinum Gimbal Downlight	IK RATING	-
ORDERING CODE	PLP9WG	BEAM ANGLE	60°
POWER	9W	DIMMING	Triac Dimming
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K	POWER FACTOR	0.85
LUMEN OUTPUT	850-950lm	LED TYPE	SMD
CUTOUT	Ø85-95mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	  
IP RATING	IP40 (front) IP20 (back)		




PURE ECO RANGE


Tricolour CCT LED Downlights




7W ECO Downlight
PLE7WD

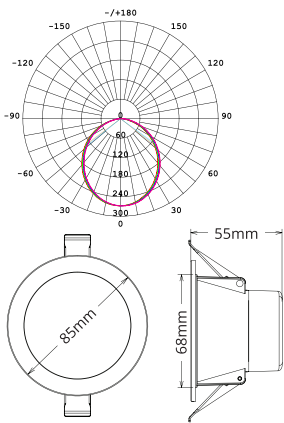

10W ECO Downlight
PLE10WD

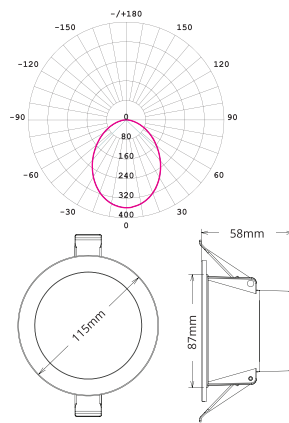

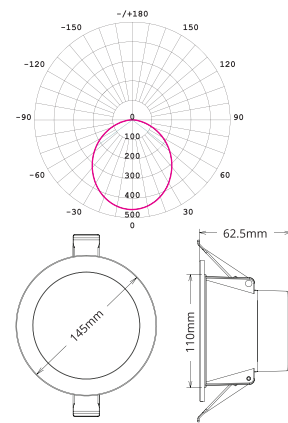


13W ECO Downlight
PLE13WD



PRODUCT FEATURES

- Flush low glare diffuser
- Plastic coated aluminium housing with built-in driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable
- Flex and plug

TECHNICAL SPECIFICATIONS

PRODUCT	PURE ECO Downlight			IK RATING	-
ORDERING CODE	PLE7WD	PLE10WD	PLE13WD	BEAM ANGLE	90°
POWER	7W	10W	13W	DIMMING	Triac Dimming
FITTING COLOUR	White			VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K			POWER FACTOR	0.9
LUMEN OUTPUT	550-620lm	800-880lm	1050-1210lm	LED TYPE	SMD
CUTOUT	Ø70-75mm	Ø90-95mm	Ø120-130mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80			CERTIFICATIONS	  
IP RATING	IP54 (front) IP40 (back)				




PURE ECO RANGE


Tricolour CCT LED Downlights



16W ECO Downlight
PLE16WD

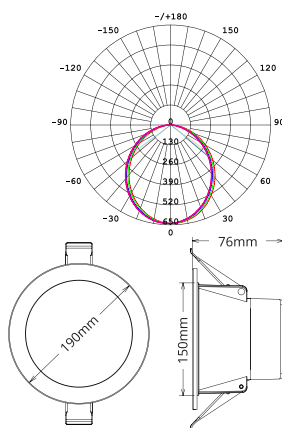

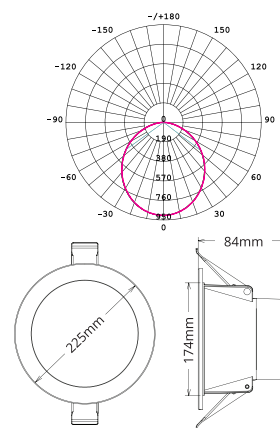


20W ECO Downlight
PLE20WD



PRODUCT FEATURES

- Flush low glare diffuser
- Plastic coated aluminium housing with built-in driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable
- Flex and plug


TECHNICAL SPECIFICATIONS

PRODUCT	PURE ECO Downlight		IK RATING	-
ORDERING CODE	PLE16WD	PLE20WD	BEAM ANGLE	90°
POWER	16W	20W	DIMMING	Triac Dimming
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	1520-1840lm	1820-2200lm	LED TYPE	SMD
CUTOUT	Ø160-170mm	Ø200-210mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	  
IP RATING	IP54 (front) IP40 (back)			





**10W ECO Downlight
Recessed Diffuser
PLER10WD**

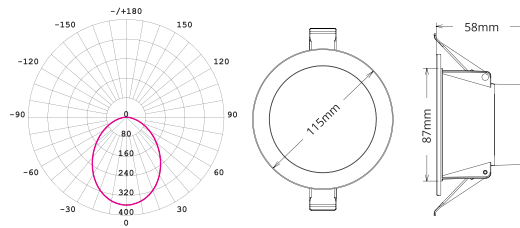

PRODUCT FEATURES

- Recessed low glare diffuser
- Plastic coated aluminium housing with built-in driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable
- Flex and plug
-

TECHNICAL SPECIFICATIONS

PRODUCT	PURE ECO Downlight - Recessed Diffuser	IK RATING	-
ORDERING CODE	PLER10WD	BEAM ANGLE	90°
POWER	10W	DIMMING	Triac Dimming
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K	POWER FACTOR	0.9
LUMEN OUTPUT	800-940lm	LED TYPE	SMD
CUTOUT	Ø90-95mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80	CERTIFICATIONS	
IP RATING	IP54 (front) IP40 (back)		




DISCUS

Tricolour CCT LED Downlights



20/30W Discus Downlight
TLDD34523WD

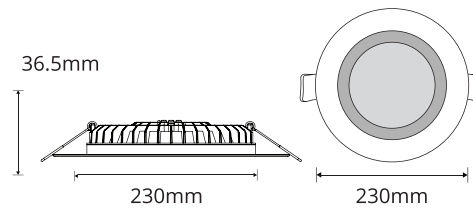

PRODUCT FEATURES

- Low profile dual wattage 20/30W fixed downlight
- Aluminium housing with PC diffuser and remote driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5000K
- Flex and plug

TECHNICAL SPECIFICATIONS



PRODUCT	Discus	IK RATING	-
ORDERING CODE	TLDD34523WD	BEAM ANGLE	100°
POWER	20W 30W	DIMMING	Non-dimmable
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K	POWER FACTOR	0.9
LUMEN OUTPUT	2250-2550lm 3000-3400lm	LED TYPE	SMD
CUTOUT	Ø170-210mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	
IP RATING	IP44 (front) IP20 (back)		



Class II



Non-dimmable



IC-F
ABUTTED &
COVERED



Tricolour



5
Year
Warranty



IP44
IP Rating




50,000
Hours
Lifespan

BLITZ II RANGE


Tricolour CCT LED Downlights





10W Blitz II - White
TLBD34510WD

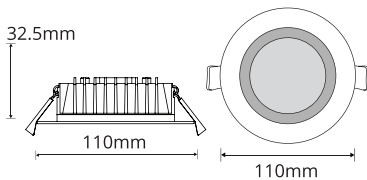

10W Blitz II - Black
TLBD34510MD

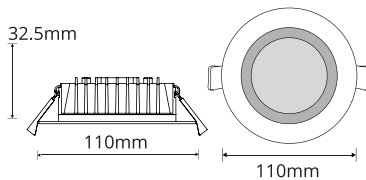

10W Blitz II - White NZ
TLBDN34510WD

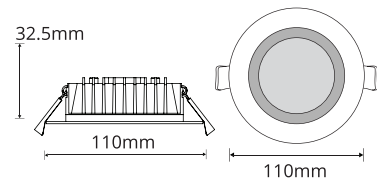

QUICK CONNECT for
hardwire installation
on NZ option

PRODUCT FEATURES

- Low glare fixed downlight with flush diffuser
- Thermoplastic housing with PC diffuser
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5000K
- Dimmable down to 10% when using a trailing edge dimmer
- Flex and plug or quick connect option

TECHNICAL SPECIFICATIONS

PRODUCT	Blitz II	IK RATING	-
ORDERING CODE	TLBD34510WD TLBD34510MD TLBDN34510WD	BEAM ANGLE	100°
POWER	10W	DIMMING	Yes, down to 10%
FITTING COLOUR	White / Black	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K	POWER FACTOR	0.9
LUMEN OUTPUT	900-970lm	LED TYPE	SMD
CUTOUT	Ø90mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	
IP RATING	IP44 (front) IP20 (back)		

MARTEC




TITAN II RANGE


Tricolour CCT LED Downlights





10W Titan II - White
TLTD34510WD

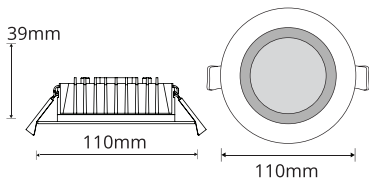

10W Titan II - Black
TLTD34510MD

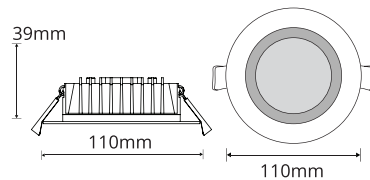

10W Titan II - White NZ
TLTDNZ34510WD

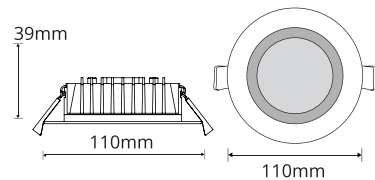

QUICK CONNECT for
hardwire installation
on NZ option

PRODUCT FEATURES

- Low glare fixed downlight with recessed diffuser
- Thermoplastic housing with PC diffuser
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5000K
- Dimmable down to 10% when using a trailing edge dimmer
- Flex and plug or quick connect option

TECHNICAL SPECIFICATIONS

PRODUCT	Titan II	IK RATING	-
ORDERING CODE	TLTD34510WD TLTD34510MD TLTDNZ34510WD	BEAM ANGLE	100°
POWER	10W	DIMMING	Yes, down to 10%
FITTING COLOUR	White / Black	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K	POWER FACTOR	0.9
LUMEN OUTPUT	900-970lm	LED TYPE	SMD
CUTOUT	Ø90mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	
IP RATING	IP44 (front) IP20 (back)		

MARTEC



Class II



Dimmable



IC Rating



Tricolour



Warranty



IP Rating




Lifespan

ARTE RANGE


Tricolour CCT LED Downlights




8W Arte Mini Downlight
TLAM34510WD

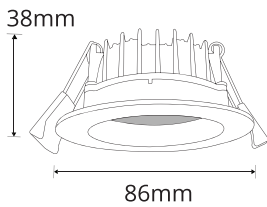

10W Gimbal Downlight
TLAG34510WD

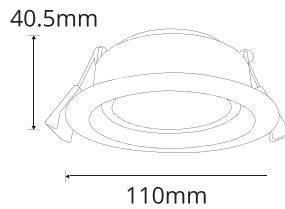

10W Arte Downlight
TLAD34510WD

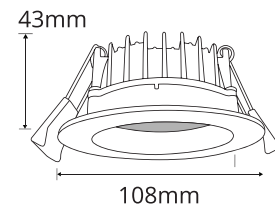

PRODUCT FEATURES

- Low glare fixed or adjustable downlight
- Aluminium housing with PC diffuser and remote driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5000K
- Dimmable down to 10% when using a trailing edge dimmer
- Flex and plug

TECHNICAL SPECIFICATIONS

PRODUCT	Mini	Gimbal	Arte	IK RATING	-
ORDERING CODE	TLAM34510WD	TLAG34510WD	TLAD34510WD	BEAM ANGLE	100°
POWER	8W	10W	10W	DIMMING	Yes, down to 10%
FITTING COLOUR	White			VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K			POWER FACTOR	0.9
LUMEN OUTPUT	600-700lm	850-990lm	850-990lm	LED TYPE	SMD
CUTOUT	Ø70mm	Ø90mm	Ø90mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80			CERTIFICATIONS	
IP RATING	IP44 (front) IP20 (back)				





OYSTER LIGHTS

Oyster lights are a popular choice for residential and commercial lighting applications due to their versatility and sleek, modern appearance. They are a versatile and effective lighting solution that can enhance the look and functionality of any space, while also providing energy-efficient and cost effective illumination.

PURE Ceiling Light Range..... 21

Orbit Range..... 22





PURE CEILING LIGHT RANGE



Tricolour CCT LED Oyster Lights





**12W Ceiling Light Ø250mm
PLCL12W**

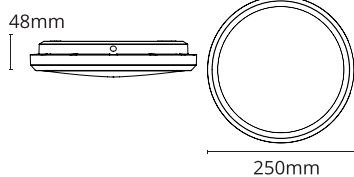

**18W Ceiling Light Ø300mm
PLCL18W**

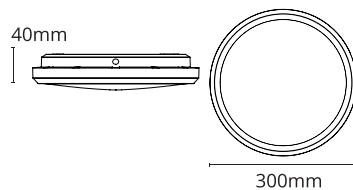

**25W Ceiling Light Ø350mm
PLCL25W**

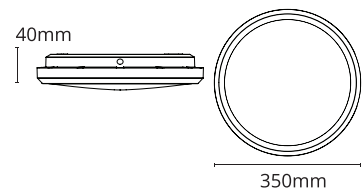

PRODUCT FEATURES

- PC body with PC opal diffuser and internal driver
- Surface mounted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable

TECHNICAL SPECIFICATIONS

PRODUCT	PURE Ceiling Lights			IK RATING	IK10
ORDERING CODE	PLCL12W	PLCL18W	PLCL25W	BEAM ANGLE	120°
POWER	12W	18W	25W	DIMMING	Triac Dimming
FITTING COLOUR	White			VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K			POWER FACTOR	0.9
LUMEN OUTPUT	1100-1300lm	1800-2100lm	2480-2900lm	LED TYPE	SMD
DIAMETER	Ø250mm	Ø300mm	Ø350mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80			CERTIFICATIONS	
IP RATING	IP54				



Class II



Dimmable



Tricolour



3 Year Warranty



IP Rating




40,000 Hours Lifespan

ORBIT RANGE


Tricolour CCT LED Oyster Lights




12W Orbit
MLOO34512

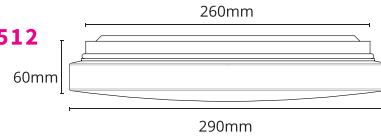


18W Orbit
MLOO34518

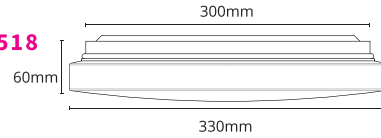

24W Orbit
MLOO34524

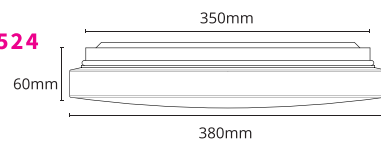

28W Orbit
MLOO34528

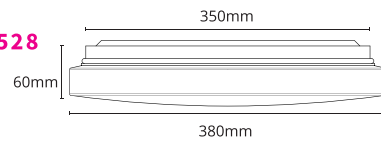

PRODUCT FEATURES

- Steel base with acrylic diffuser and built-in driver
- Centre cable feed
- CCT selectable 3000K, 4000K, 5000K

TECHNICAL SPECIFICATIONS

PRODUCT	Orbit				IK RATING	-
ORDERING CODE	MLOO34512	MLOO34518	MLOO34524	MLOO34528	BEAM ANGLE	120°
POWER	12W	18W	24W	28W	DIMMING	Non-dimmable
FITTING COLOUR	White				VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K				POWER FACTOR	0.9
LUMEN OUTPUT	900-1000lm	1400-1600lm	1700-1900lm	2200-2400lm	LED TYPE	SMD
DIAMETER	Ø290mm	Ø330mm	Ø380mm	Ø380mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80				CERTIFICATIONS	
IP RATING	IP20					

MARTEC





RESIDENTIAL LIGHTING

Residential lighting should aim to provide comfort, functionality, safety and energy efficiency to enhance the aesthetics and livability of a home. PURE offers a stylish and functional range of both indoor and outdoor residential lighting.

PURE Pillar and Bollard Range	25
PURE Wall Light Range	26
PURE Track Light Range	30
PURE Pendant Lights	33
PURE Mirror Lights	34
PURE Reading Lights	35
PURE Wireless Switches	36



PURE PILLAR & BOLLARD RANGE

Outdoor LED Lights for Wall Pillars and Bollards



8W Pillar Light
Clear Diffuser
PLBL8C



8W Pillar Light
Frosted Diffuser
PLBL8F



Wall Pillar
PLBLPW
Ø100mm Diameter,
Black Aluminium

Image Shown:
PLBL8F + PLBLPW



Bollard
PLBLP40 - 400mm
PLBLP100 - 1000mm
PLBLPGM - Ground Spike
Ø100mm Diameter,
Black Aluminium

Image Shown:
PLBL8C + PLBLP100

PRODUCT FEATURES

- Ø100mm diameter powder coated aluminium pillar with clear and frosted options
- Powder coated aluminium wall pillar, 400mm and 1000mm bollard options
- CCT selectable 3000K, 4000K
- 240V - hardwire

TECHNICAL SPECIFICATIONS

PRODUCT	Clear	Frosted	IK RATING	IK08
ORDERING CODE	PLBL8C	PLBL8F	BEAM ANGLE	360° 320°
POWER	8W		DIMMING	Triac Dimming
FITTING COLOUR	Black		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K		POWER FACTOR	0.88
LUMEN OUTPUT	500-600lm	600-700lm	LED TYPE	SMD
DIAMETER	Ø100mm		OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP65			




PURE WALL LIGHT RANGE


Outdoor Adjustable LED Wall Lights



10W Adjustable Wall Light
Black
PLWLTB10

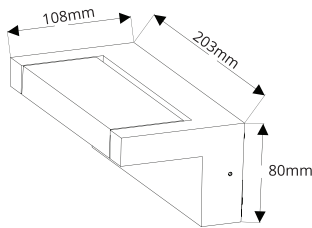

10W Adjustable Wall Light
White
PLWLTW10

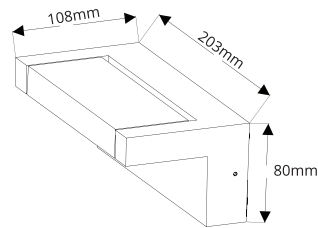

PRODUCT FEATURES

- Aluminium body with multi-louvered frosted tempered glass
- 240° swivel
- 240V - hardwire




TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK06
ORDERING CODE	PLWLTB10	PLWLTW10	BEAM ANGLE	90°
POWER	10W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	3000K		POWER FACTOR	0.9
LUMEN OUTPUT	1100lm		LED TYPE	SMD
DIMENSIONS	203 X 108 X 80mm		OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP65			





PURE WALL LIGHT RANGE


Outdoor Tricolour Rectangle LED Wall Lights

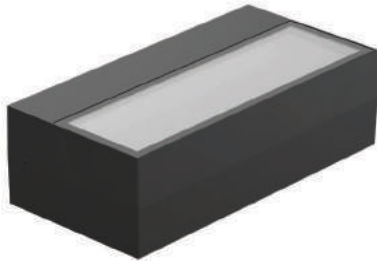

10W Rectangle Wall Light
Black
PLWLDB10

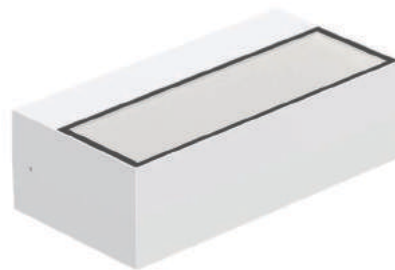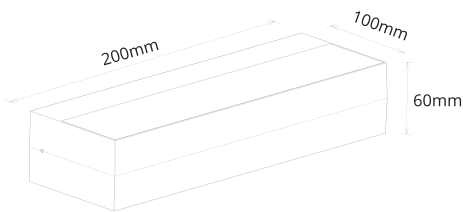

10W Rectangle Wall Light
White
PLWLDW10

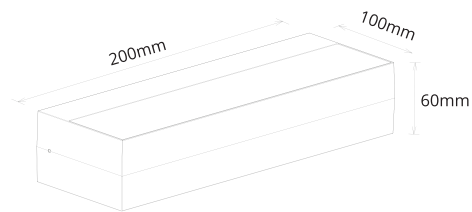


PRODUCT FEATURES

- Direct / indirect wall light
- Powder coated aluminium with glass diffuser
- CCT selectable 3000K, 4000K, 5700K
- 240V - hardwire

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK06
ORDERING CODE	PLWLDB10	PLWLDW10	BEAM ANGLE	60° X 115° X 40°
POWER	10W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	600-750lm		LED TYPE	SMD
DIMENSIONS	200 X 100 X 60mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP65			

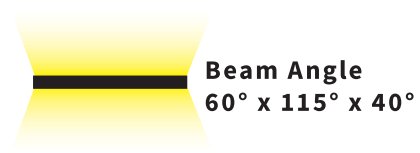


PURE WALL LIGHT RANGE


Outdoor Tricolour Round LED Wall Lights



15W Round Wall Light
Black
PLWLUB15

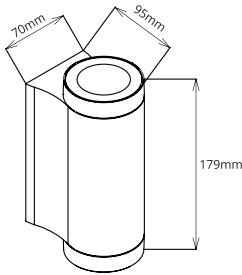

15W Round Wall Light
White
PLWLUDW15

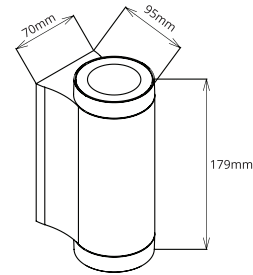

PRODUCT FEATURES

- Direct / indirect wall light
- Aluminium body with PC diffuser
- CCT selectable 3000K, 4000K, 5700K
- 240V - hardwire

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK06
ORDERING CODE	PLWLUB15	PLWLUDW15	BEAM ANGLE	45°
POWER	15W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	1350-1700lm		LED TYPE	SMD
DIMENSIONS	70 X 179 X 95mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP65			




PURE WALL LIGHT RANGE

Outdoor Tricolour LED Bunker Lights




10 Oval Bunker Light
Black

PLWLB10

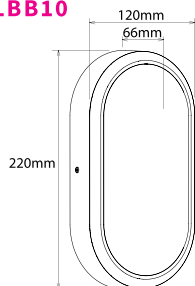

10 Oval Bunker Light
White

PLWLBW10

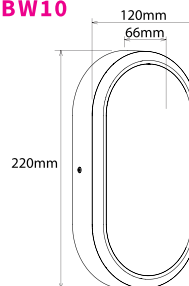

PRODUCT FEATURES

- PC body with frosted PC diffuser
- Corrosion resistant
- CCT selectable 3000K, 4000K, 5700K
- Wall mounted
- 240V - hardwire

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK08
ORDERING CODE	PLWLB10	PLWLBW10	BEAM ANGLE	120°
POWER	10W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	900-1100lm		LED TYPE	SMD
DIMENSIONS	220 X 120 X 66mm		OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP65			




PURE TRACK LIGHT RANGE

LED Track Heads




15W Track Lights

PLTLB15 - Black
PLTLW15 - White

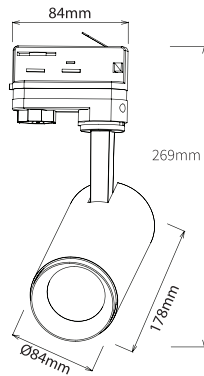


25W Track Lights

PLTLB25 - Black
PLTLW25 - White

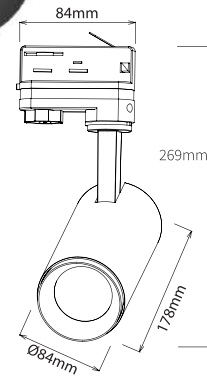


PRODUCT FEATURES


- Low glare design 60° lens standard, 24° and 36° optional
- Aluminium body with PMMA diffuser
- CCT selectable 3000K, 4000K, 5000K
- CRI >90
- 3-Circuit Track Lights



24° Lens
PLTLL24



36° Lens
PLTLL36



60° Lens
Standard

TECHNICAL SPECIFICATIONS

PRODUCT	15W Track	25W Track	IK RATING	IK06
ORDERING CODE	PLTLB15 PLTLW15	PLTLB25 PLTLW25	BEAM ANGLE	60°
POWER	15W 15W	25W 25W	DIMMING	Triac Dimming
FITTING COLOUR	Black White	Black White	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K		POWER FACTOR	0.9
LUMEN OUTPUT	1200-1500lm	1950-2450lm	LED TYPE	COB
DIMENSIONS	Ø84 X 178 X 269mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>90		CERTIFICATIONS	
IP RATING	IP20			



PURE TRACK LIGHT RANGE

LED Track Accessories

LENSES



Code	Description
PLTLL24	24° Lens
PLTLL36	36° Lens

TRACK & MOUNTING



Code	Description
PLTLBW PLTLBB	Surface Mount Plate White Surface Mount Plate Black
PL-0410W PL-0410B	3-Circuit 1M Track White 3-Circuit 1M Track Black
PL-0420W PL-0420B	3-Circuit 2M Track White 3-Circuit 2M Track Black
PL-0430W PL-0430B	3-Circuit 3M Track White 3-Circuit 3M Track Black
PL-M14W PL-M14B	Reinforcement Plate White Reinforcement Plate Black



PLTLW15 + PL-0410W

JOINERS



Code	Description
PL-0434W PL-0434B	Joiner Centre Feed White Joiner Centre Feed Black
PL-0431LW PL-0431LB	Live-End Left White Live-End Left Black
PL-0431RW PL-0431RB	Live-End Right White Live-End Right Black
PL-0432W PL-0432B	End Cap White End Cap Black
PL-0433W PL-0433B	Straight Joiner White Straight Joiner Black
PL-0433AW PL-0433AB	Isolation Joiner White Isolation Joiner Black
PL-M436LW PL-M436LB	T-Joiner Left White T-Joiner Left Black
PL-M436RW PL-M436RB	T-Joiner Right White T-Joiner Right Black
PL-0437W PL-0437B	Cross-Joiner White Cross-Joiner Black
PL-M438W PL-M438B	L-Joiner Reversing White L-Joiner Reversing Black

SUSPENSION



Code	Description
PL-04SKW PL-04SKB	Suspension Bracket White Suspension Bracket Black
PL-EZ0447W PL-EZ0447B	Suspension Rod 1m White Suspension Rod 1m Black
PL-M146TW PL-M146TB	T-Bar Mounting White T-Bar Mounting Black
PL-EZ0448W PL-EZ0448B	Suspension Cable 1.5m White Suspension Cable 1.5m Black




PURE PENDANT LIGHT


Hanging LED Pendant Light



10W Pendant Light
Black
PLPLB10

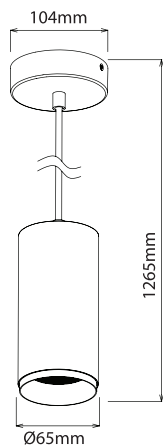


10W Pendant Light
White
PLPLW10

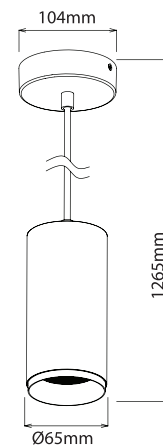


PRODUCT FEATURES


- Low glare design 60° lens standard, 24° and 36° optional
- Suspended pendant light
- Aluminium body with PMMA diffuser
- CCT selectable 3000K, 4000K, 5000K
- CRI>90
- 240V - hardwire



24° Lens
PLTLL24



36° Lens
PLTLL36

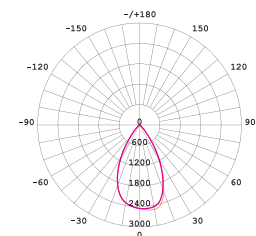

60° Lens
Standard

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK06
ORDERING CODE	PLPLB10	PLPLW10	BEAM ANGLE	60°
POWER	10W		DIMMING	Triac Dimming
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K		POWER FACTOR	0.9
LUMEN OUTPUT	750-950lm		LED TYPE	COB
DIMENSIONS	Ø65mm x 1265mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>90		CERTIFICATIONS	
IP RATING	IP20			




PURE MIRROR LIGHT


LED Mirror Light



10W Mirror Light
PLMLB10 - Black
PLMLW10 - White

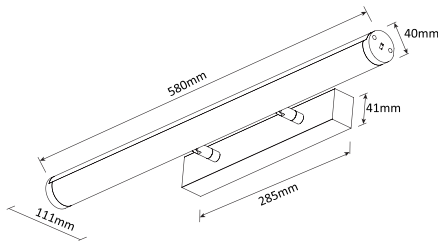

20W Mirror Light
PLMLB20 - Black
PLMLW20 - White

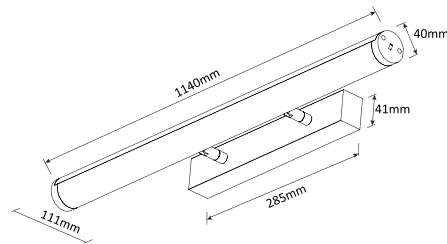

PRODUCT FEATURES

- Aluminium body with PC diffuser
- Tilttable to help eliminate shadows
- CCT selectable 3000K, 4000K, 5000K
- Provides uniform light output using SMD technology

TECHNICAL SPECIFICATIONS

PRODUCT	10W Mirror Light		20W Mirror Light		IK RATING	IK08
ORDERING CODE	PLMLB10	PLMLW10	PLMLB20	PLMLW20	BEAM ANGLE	120°
POWER	10W	10W	20W	20W	DIMMING	Non-dimmable
FITTING COLOUR	Black	White	Black	White	VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5000K				POWER FACTOR	0.9
LUMEN OUTPUT	1020-1150lm		2100-2430lm		LED TYPE	SMD
DIMENSIONS	580 X 41 X 111mm		1140 X 41 X 111mm		OPERATING TEMP	-20°~+45°C
CRI	Ra>80				CERTIFICATIONS	
IP RATING	IP40					



PURE READING LIGHT


Adjustable Reading Light



3W Reading Light

PLRLB3 - Black

PLRLW3 - White

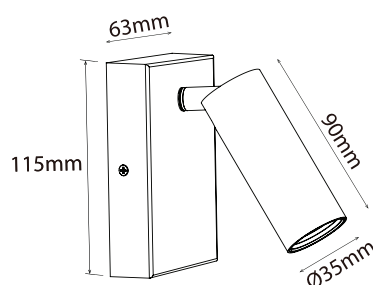

PRODUCT FEATURES


- Compact artistic design
- Aluminium body with PMMA diffuser
- Adjustable for comfortable reading
- 240V - hardwire

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK06
ORDERING CODE	PLRLB3	PLRLW3	BEAM ANGLE	50°
POWER	3W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	3000K		POWER FACTOR	0.9
LUMEN OUTPUT	200lm		LED TYPE	SMD
DIMENSIONS	115 X 63 X 71mm		OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP20			



PURE WIRELESS SWITCHES




PRODUCT FEATURES

- The Pure LED Self Powered Switch, paired with a receiver to give you the ideal lighting control solution; reducing install time and overall costs. This switch is not limited to lighting, it is widely used in the industrial and commercial market in control circuits, VSD's and soft starters. This product has no limits!
- NO WIRING REQUIRED
No wires required between the switch and the receiving controller
- SIMPLE TO INSTALL AND MOVE
The switch can be easily fixed onto any suitable surface and is easy to relocate to a more convenient location as required
- WATER RESISTANT
Designed to cope with areas where moisture is present
- DURABLE
Long life expectancy as no reliance on battery technology
- ECO-FRIENDLY, COST SAVING & MAINTENANCE FREE
- NO BATTERY REQUIRED
reducing running costs and avoiding maintenance


TECHNICAL SPECIFICATIONS

PRODUCT	Wireless Switches			
ORDERING CODE	PLEE154	PLEE0254	PLEE354	PLERC302
SWITCHES	1	2	3	Receiver
SWITCH COLOUR	White			
RANGE	80m Outdoors / 25m Indoors			
LIFESPAN	> 100000 hours			
DIMENSIONS	86mm x 86mm x 15mm			
FREQUENCY	RF 433MHz			
CAPACITY	Up to 10 Switches			

1-Gang Rocker Switch
PLEE154

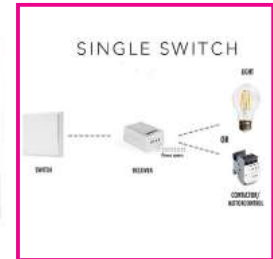

2-Gang Rocker Switch
PLEE0254



3-Gang Rocker Switch
PLEE354



Wireless Receiver
PLERC302





EXTERIOR SPOTLIGHTS

Spotlights enhance visibility and safety especially at night. PURE spotlights are energy efficient, long lasting and durable. They offer great flexibility with single or twin spots, colour selection and sensor options.

PURE Spotlight Range	39
----------------------------	----




PURE SPOTLIGHT RANGE


Outdoor LED Single Spotlight



13W Single Spotlight
Black
PLS13WB

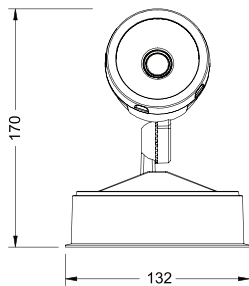


13W Single Spotlight
White
PLS13WW

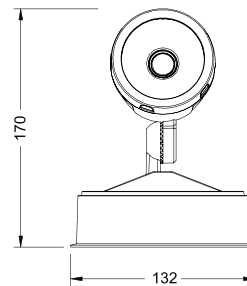

PRODUCT FEATURES

- PC body with PC diffuser
- Ceiling and wall mount
- CCT selectable 3000K, 4000K, 5700K
- Quick fit mounting
- 240V - hardwire



Quick Fit System

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK08
ORDERING CODE	PLS13WB	PLS13WW	BEAM ANGLE	120°
POWER	13W		DIMMING	Non-dimmable
FITTING COLOUR	Black /White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	850lm		LED TYPE	COB
DIMENSIONS	170 X 132mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP65			




PURE SPOTLIGHT RANGE


Outdoor LED Single Spotlight with Sensor



13W Single Spotlight with Sensor - Black
PLS13WSB

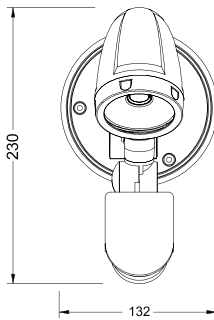


13W Single Spotlight with Sensor - White
PLS13WSW

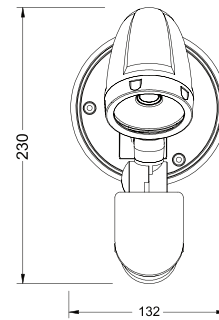

PRODUCT FEATURES

- PC body with PC diffuser
- Detection range 180°/12m
- Lux level and time duration adjustable
- CCT selectable 3000K, 4000K, 5700K
- Quick fit mounting
- 240V - hardwire



Quick Fit System

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK08
ORDERING CODE	PLS13WSB	PLS13WSW	BEAM ANGLE	120°
POWER	13W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	850lm		LED TYPE	COB
DIMENSIONS	170 X 132mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP54			




PURE SPOTLIGHT RANGE


Outdoor LED Twin Spotlight



26W Twin Spotlight
Black
PLS26WB

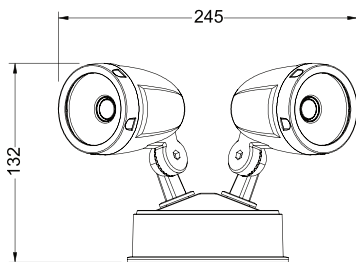


26W Twin Spotlight
White
PLS26WW

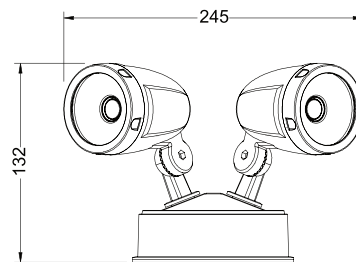

PRODUCT FEATURES

- PC body with PC diffuser
- Ceiling and wall mount
- CCT selectable 3000K, 4000K, 5700K
- Quick fit mounting
- 240V - hardwire



Quick Fit System

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK08
ORDERING CODE	PLS26WB	PLS26WW	BEAM ANGLE	120°
POWER	2 x 13W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	1700lm		LED TYPE	COB
DIMENSIONS	245 X 132mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP65			




PURE SPOTLIGHT RANGE


Outdoor LED Twin Spotlight with Sensor



26W Twin Spotlight with Sensor - Black
PLS26WSB

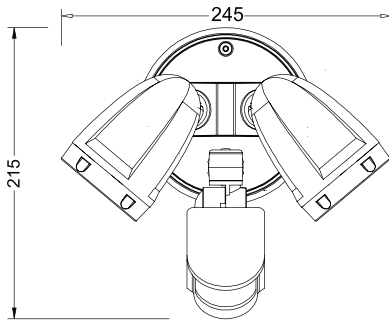


26W Twin Spotlight with Sensor - White
PLS26WSW

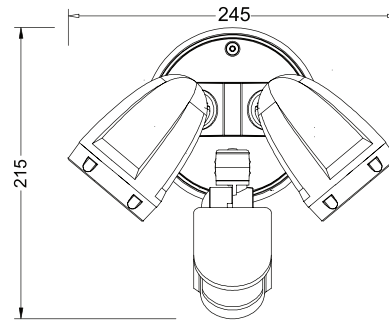

PRODUCT FEATURES

- PC body with PC diffuser
- Detection range 180°/12m
- Lux level and time duration adjustable
- CCT selectable 3000K, 4000K, 5700K
- Quick fit mounting
- 240V - hardwire



Quick Fit System

TECHNICAL SPECIFICATIONS

PRODUCT	Black	White	IK RATING	IK08
ORDERING CODE	PLS26WSB	PLS26WSW	BEAM ANGLE	120°
POWER	2 x 13W		DIMMING	Non-dimmable
FITTING COLOUR	Black / White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	1700lm		LED TYPE	COB
DIMENSIONS	245 X 215mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP54			





BATTEN LIGHTS, UNDERVERANDAHS & PANELS

Batten lights and underverandah lights are an energy efficient way to provide illumination over a large area. They are a low maintenance, versatile and practical lighting option for a range of applications in commercial, industrial and domestic environments.

Panel lights provide an even, bright illumination across a wide area. LED panel lights are becoming increasingly popular in offices, commercial spaces, hospitals and schools due to their wide range of options.


PURE Eco Range Batten Light	44
PURE Elite Batten Range	45
PURE Slimline Batten Range.....	46
PURE Underverandah Range	47
PURE Panel Range	48

PURE ECO RANGE BATTEN

CCT Selectable LED Battens



50W Eco Batten Light
PL-E150-50W

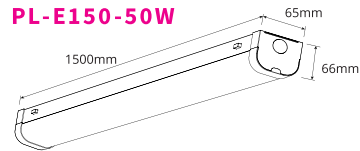

PRODUCT FEATURES

- Low profile slim batten light
- Metal housing with PC diffuser
- Easy installation
- CCT selectable 4000K, 6000K

TECHNICAL SPECIFICATIONS

PRODUCT	Eco Batten	IK RATING	IK06
ORDERING CODE	PL-E150-50W	BEAM ANGLE	120°
POWER	50W	DIMMING	Non-dimmable
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 6000K	POWER FACTOR	0.9
LUMEN OUTPUT	7200-7700lm	LED TYPE	SMD
DIMENSIONS	1500 X 65 X 66mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	ROHS CE SAA
IP RATING	IP20		




PURE ELITE BATTEN RANGE


CCT Selectable LED Battens



40W Elite Batten Light
PL-U120-40W

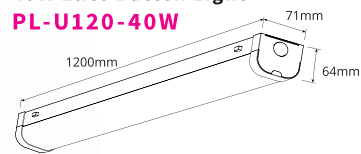

50W Elite Batten Light
PL-U150-50W

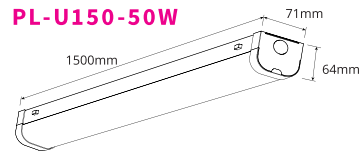

PRODUCT FEATURES

- Low profile slim batten light
- Metal housing with PC diffuser
- 4 Fast release buttons for easy installation
- CCT selectable 4000K, 6000K
- Emergency option available in 50W see page 87 in PURE Emergency Range

TECHNICAL SPECIFICATIONS

Emergency Option Available

PRODUCT	Elite Batten		IK RATING	IK08
ORDERING CODE	PL-U120-40W	PL-U150-50W	BEAM ANGLE	120°
POWER	40W	50W	DIMMING	Non-dimmable
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 6000K		POWER FACTOR	0.9
LUMEN OUTPUT	3800-4200lm	5500-6100lm	LED TYPE	SMD
DIMENSIONS	1200 X 71 X 64mm	1500 X 71 X 64mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP20			



Non-dimmable



CCT



Warranty



IP Rating




Lifespan

PURE SLIMLINE BATTEN RANGE


LED Battens



4000K Slimline Batten
NW-LED220-YPC



6000K Slimline Batten
CW-LED220-YPC



PRODUCT FEATURES

- Superior heat dissipation
- Built-in driver
- Integrated modular LED aluminium baseboard design
- 120° Beam angle
- IP44 Rated


TECHNICAL SPECIFICATIONS

PRODUCT	Slimline 4000K	Slimline 6000K	IK RATING	IK08
ORDERING CODE	NW-LED220-YPC	CW-LED220-YPC	BEAM ANGLE	120°
POWER	40W		DIMMING	Non-dimmable
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	4000K	6000K	POWER FACTOR	0.95
LUMEN OUTPUT	4400lm		LED TYPE	SMD
DIMENSIONS	1200 X 120 X40mm		OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP44			




PURE UNDERVERANDAH RANGE

CCT Selectable LED Underverandah

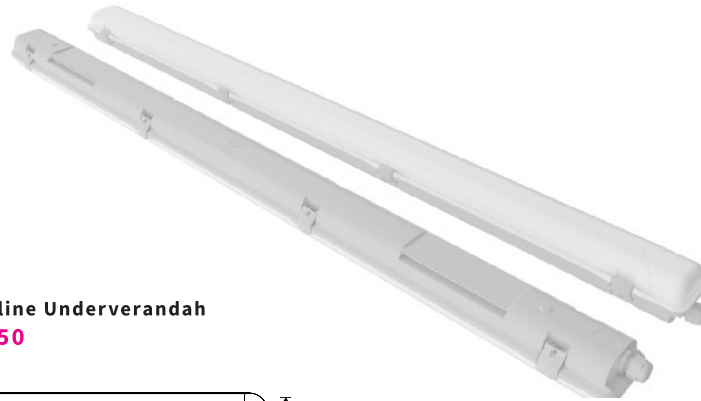




50W Slimline Underverandah
PLUV1550



PRODUCT FEATURES

- PC housing with PC diffuser
- Middle and side cable entry
- CCT selectable 4000K, 5000K, 6500K

TECHNICAL SPECIFICATIONS


PRODUCT	Slimline Underverandah	IK RATING	IK08
ORDERING CODE	PLUV1550	BEAM ANGLE	120°
POWER	60W	DIMMING	Non-dimmable
FITTING COLOUR	White and Grey	VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 5000K, 6500K	POWER FACTOR	0.9
LUMEN OUTPUT	4250lm-5250lm	LED TYPE	SMD
DIMENSIONS	1500 X 90 X 75mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	  
IP RATING	IP65		



PURE PANEL RANGE
High Output LED Panel Light



60W 600x1200 Panel Light
PL-HCT60120

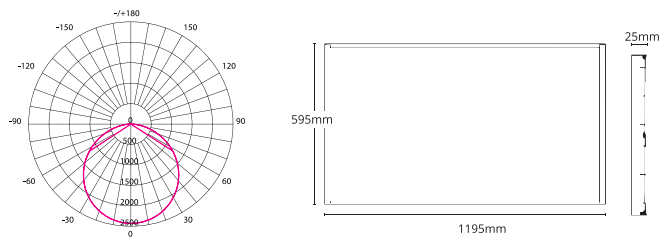

PRODUCT FEATURES

- Low glare slim back-lit panel
- Standard non-dimmable, 0-10V and DALI dimmable options available
- CCT Selectable 4000K, 5000K, 6000K
- Supplied with 0.6m flex and plug

TECHNICAL SPECIFICATIONS

See Panel Accessories Page 52

PRODUCT	High Output Panel	IK RATING	IK03
ORDERING CODE	PL-HCT60120	BEAM ANGLE	120°
POWER	60W	DIMMING	Non-dimmable (dimming options available)
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 5000K, 6000K	POWER FACTOR	0.9
LUMEN OUTPUT	7000-7200lm	LED TYPE	SMD
DIMENSIONS	595 X 1195 X 25mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	
IP RATING	IP40		





PURE PANEL RANGE


Tricolour CCT LED Panel Light





36W 600x600 Panel Light
PL-CCT6060



36W 300x1200 Panel Light
PL-CCT30120



50W 600x1200 Panel Light
PL-CCT60120

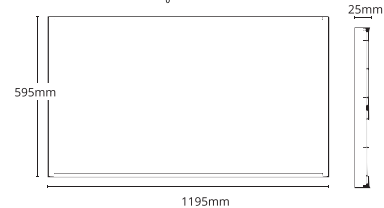

PRODUCT FEATURES

- Low glare slim back-lit panel
- Standard non-dimmable, 0-10V and DALI dimmable options available
- CCT Selectable 4000K, 5000K, 6000K
- Supplied with 0.6m flex and plug

TECHNICAL SPECIFICATIONS

See Panel Accessories Page 52

PRODUCT	600x600	300x1200	600x1200	IK RATING	IK03
ORDERING CODE	PL-CCT6060	PL-CCT30120	PL-CCT60120	BEAM ANGLE	120°
POWER	36W	36W	50W	DIMMING	Non-dimmable (dimming options available)
FITTING COLOUR	White			VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 5000K, 6000K			POWER FACTOR	0.9
LUMEN OUTPUT	3200-3600lm	3200-3600lm	5100-5400lm	LED TYPE	SMD
DIMENSIONS	595 X 595mm	295 X 1195mm	595 X 1195mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80			CERTIFICATIONS	
IP RATING	IP40				




PURE PANEL RANGE


4000K LED Panel Light



36W 600x600 Panel Light
NW-6060BL

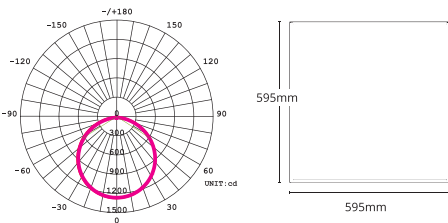

50W 600x1200 Panel Light
NW-60120BL

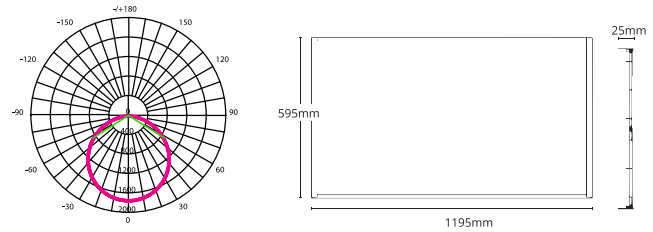

PRODUCT FEATURES

- Low glare slim back-lit panel
- Standard non-dimmable, 0-10V and DALI dimmable options available
- Supplied with 0.6m flex and plug

TECHNICAL SPECIFICATIONS

See Panel Accessories Page 52

PRODUCT	600x600	600x1200	IK RATING	IK03
ORDERING CODE	NW-6060BL	NW-60120BL	BEAM ANGLE	120°
POWER	36W	50W	DIMMING	Non-dimmable (dimming options available)
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	4000K		POWER FACTOR	0.9
LUMEN OUTPUT	3600lm	5000lm	LED TYPE	SMD
CUTOUT	595 X 595mm	595 X 1195mm	OPERATING TEMP	-20°~+40°C
CRI	Ra>80		CERTIFICATIONS	
IP RATING	IP40			




PURE PANEL RANGE

Low UGR High CRI 4000K LED Panel Light




Low Glare with High CRI

36W 600x600 Panel Light NW-6060UGR

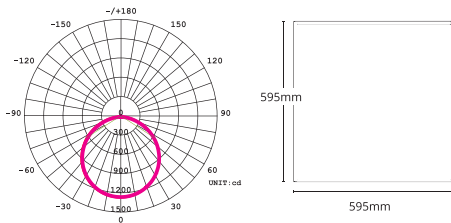

50W 600x1200 Panel Light NW-60120UGR

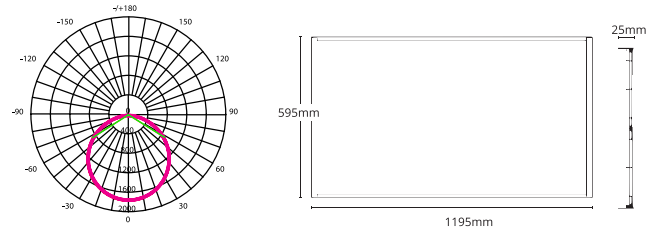

PRODUCT FEATURES

- UGR<19 and CRI>90 with $R_g > 50$
- Low glare slim back-lit panel
- Standard non-dimmable, 0-1V and DALI dimmable options available
- Supplied with 0.6m flex and plug

TECHNICAL SPECIFICATIONS

See Panel Accessories Page 52

PRODUCT	600x600	600x1200	IK RATING	IK03
ORDERING CODE	NW-6060UGR	NW-60120UGR	BEAM ANGLE	90°
POWER	36W	50W	DIMMING	Non-dimmable (dimming options available)
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	4000K		POWER FACTOR	0.9
LUMEN OUTPUT	3360lm	4700lm	LED TYPE	SMD
CUTOUT	595 X 595mm	595 X 1195mm	OPERATING TEMP	-10°~+40°C
CRI	Ra>90		CERTIFICATIONS	
IP RATING	IP40			



Class II



Non-dimmable



CCT



Warranty



IP Rating



Lifespan

PURE PANEL RANGE

Panel Accessories



Suspension Kit

PLHK6060 - 4pc
PLHK60120 - 6pc



Recessed Clips - 4pc

PLRC6060 - 4pc
PLRC60120 - 6pc



Surface Mount Kits - 70mm deep

PLBR6060 - to suit 600x600 back-lit panels
PLBR30120 - to suit 300x1200 back-lit panels
PLBR60120 - to suit 600x1200 back-lit panels



0-10V Dimmable Drivers

PLD6060V - to suit 600x600 or 300x1200 panels
PLD60120V - to suit 600x1200 panels



DALI Dimmable Drivers

PLD6060DALI - to suit 600x600 or 300x1200 panels
PLD60120DALI - to suit 600x1200 panels



FLOODLIGHTS, STREET LIGHTS

LED floodlights and street lights are an excellent outdoor lighting option due to their energy efficiency, long lifespan, durability and versatility. They provide bright and uniform light, making them ideal for illuminating large outdoor spaces while reducing energy costs. PURE offers a variety of fittings with optional beam angles to suit any job.

PURE specialises in lighting systems for sporting facilities such as rugby fields, football fields, cricket pitches and more. PURE offers everything from design, to fitting and pole supply.


PURE Slimline Floodlight Range.....	54
PURE Eco Range Floodlights.....	56
Invictus II Range	58
Pure Eco Range Sports Lights	60
Pure Platinum Range Sports Lights.....	62
Pure Sports Court Range.....	64
Pure Eco Range Street Lights	66
Pure Platinum Range Street Lights.....	68
Light Poles	70

PURE SLIMLINE FLOOD RANGE


Outdoor LED Floodlights



50W Slimline Flood
PLFL50W

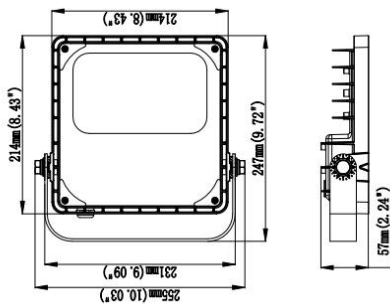

100W Slimline Flood
PLFL100W

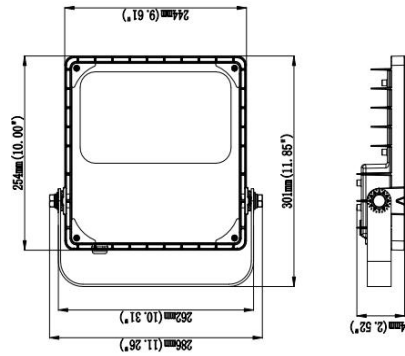

PRODUCT FEATURES

- Powder coated aluminium housing with tempered glass diffuser
- Bracket mounting
- Streamline design to prevent water accumulation
- High lumen output

TECHNICAL SPECIFICATIONS

PRODUCT	50W Slimline	100W Slimline	IK RATING	IK08
ORDERING CODE	PLFL50W	PLFL100W	BEAM ANGLE	120° Symmetrical
POWER	50W	100W	DIMMING	Non-dimmable
FITTING COLOUR	Black		VOLTAGE	AC220-240V
CCT	5700K		POWER FACTOR	0.9
LUMEN OUTPUT	7500lm	15000lm	LED TYPE	SMD
DIMENSIONS	247 X 255 X 57mm	301 X 284 X 65mm	OPERATING TEMP	-30°~+40°C
CRI	Ra>70		CERTIFICATIONS	
IP RATING	IP66			




PURE SLIMLINE FLOOD RANGE


Outdoor LED Floodlights



150W Slimline Flood
PLFL150W

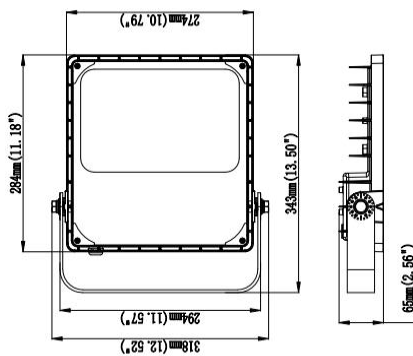

200W Slimline Flood
PLFL200W

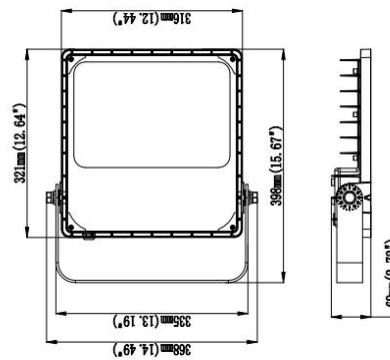

Outrigger Mounting Bracket
PLFLOM

TECHNICAL SPECIFICATIONS

PRODUCT	150W Slimline	200W Slimline	IK RATING	IK08
ORDERING CODE	PLFL150W	PLFL200W	BEAM ANGLE	120° Symmetrical
POWER	150W	200W	DIMMING	Non-dimmable
FITTING COLOUR	Black		VOLTAGE	AC220-240V
CCT	5700K		POWER FACTOR	0.9
LUMEN OUTPUT	22500lm	30000lm	LED TYPE	SMD
DIMENSIONS	343 X 318 X 65mm	398 X 368 X 69mm	OPERATING TEMP	-30°~+40°C
CRI	Ra>70		CERTIFICATIONS	
IP RATING	IP66			




PURE ECO RANGE


Outdoor LED Floodlights




50W Eco Flood
PLEFL50W

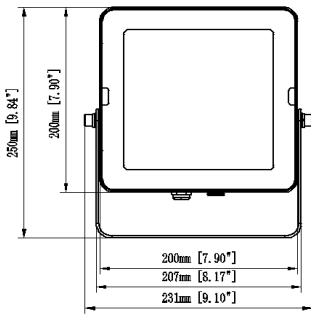

100W Eco Flood
PLEFL100W

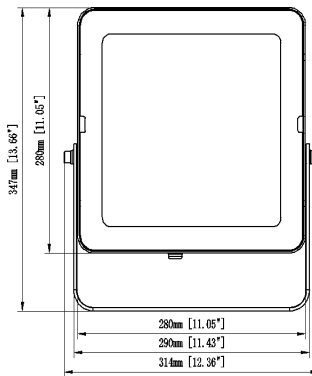

200W Eco Flood
PLEFL200W

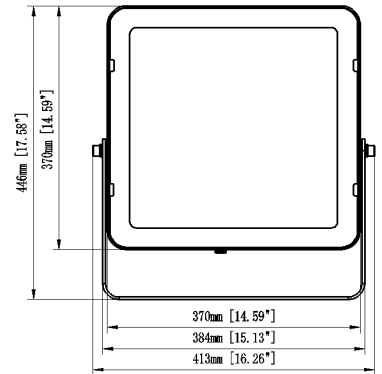

PRODUCT FEATURES

- Powder coated aluminium housing with tempered glass diffuser
- Bracket mounting
- Honeycomb reflector for lower glare

TECHNICAL SPECIFICATIONS

PRODUCT	50W Eco	100W Eco	200W Eco	IK RATING	IK07
ORDERING CODE	PLEFL50W	PLEFL100W	PLEFL200W	BEAM ANGLE	90° Symmetrical
POWER	50W	100W	200W	DIMMING	Non-dimmable
FITTING COLOUR	Black			VOLTAGE	AC220-240V
CCT	5000K			POWER FACTOR	0.95
LUMEN OUTPUT	6250lm	12500lm	25000lm	LED TYPE	SMD
DIMENSIONS	250 X 231mm	347 X 314mm	446 X 413mm	OPERATING TEMP	-30°~+40°C
CRI	Ra>70			CERTIFICATIONS	
IP RATING	IP66				






PURE has recognised the significance of the market niche for sports lighting and have focused our attention on developing our expertise and capability in this area. With a team of knowledgeable Lighting Specialists and a Lighting Designer with extensive experience in sports lighting our team is confident in offering cost-saving, energy-efficient solutions for any sports lighting project.


INVICTUS II RANGE
Outdoor LED Sports Lights



250W Invictus II
INVICTUS250
Internal Driver

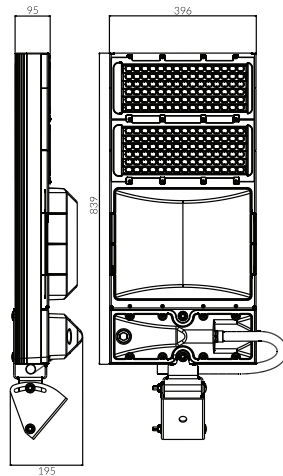

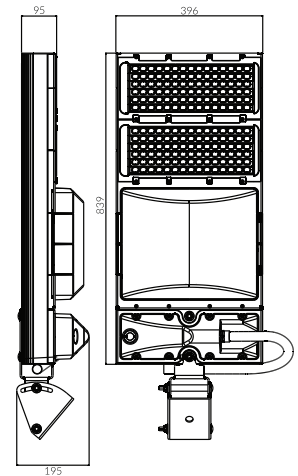

500W Invictus II
INVICTUS500
Internal Driver



PRODUCT FEATURES

- Australian made
- 10 Year warranty
- Lightweight & flat-mount with Aluminium body
- Colour temperature, beam angle and dimming options
- Glare control shields available

TECHNICAL SPECIFICATIONS

PRODUCT	Invictus II		IK RATING	IK08
ORDERING CODE	INVICTUS250	INVICTUS500	BEAM ANGLE	Optional Optics
POWER	250W	500W	DIMMING	1-10V, DMX and DALI options
FITTING COLOUR	Black		VOLTAGE	AC220-240V
CCT	5000K (4000K optional)		POWER FACTOR	0.9
LUMEN OUTPUT	35000lm	70000lm	LED TYPE	LED 3030
WEIGHT	15Kg	15Kg	OPERATING TEMP	-40°~+50°C
CRI	Ra>70 (Ra>80 and Ra>90 optional)		CERTIFICATIONS	 
IP RATING	IP66			





INVICTUS II RANGE


Outdoor LED Sports Lights



1000W Invictus II
INVICTUS1000
External or
Internal Drivers

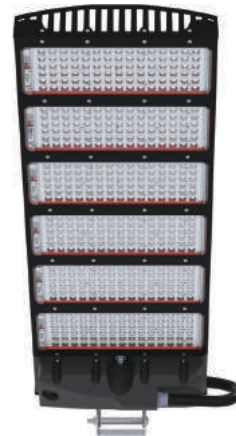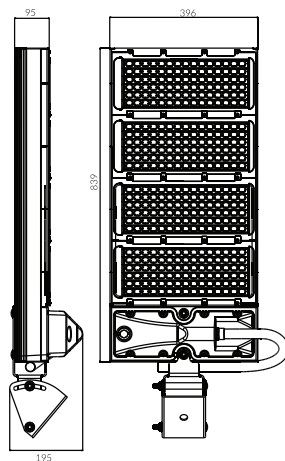

1500W Invictus II
INVICTUS1500
External Driver

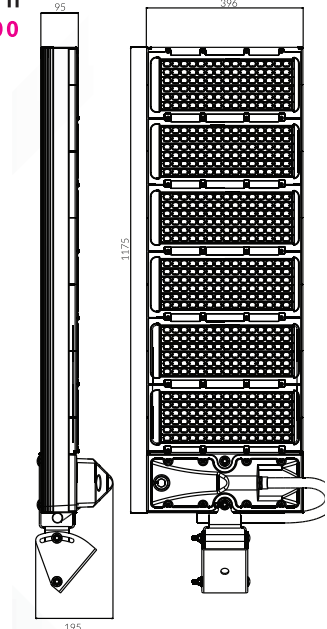

TECHNICAL SPECIFICATIONS

PRODUCT	Invictus II	IK RATING	IK08
ORDERING CODE	INVICTUS1000 INVICTUS1500	BEAM ANGLE	Optional Optics
POWER	1000W 1500W	DIMMING	1-10V, DMX and DALI options
FITTING COLOUR	Black	VOLTAGE	AC220-240V
CCT	5000K (4000K optional)	POWER FACTOR	0.9
LUMEN OUTPUT	140000lm 210000lm	LED TYPE	LED3030
LAMP WEIGHT	15Kg 26Kg	OPERATING TEMP	-40°~+50°C
CRI	Ra>70 (Ra>80 and Ra>90 optional)	CERTIFICATIONS	CE SAA
IP RATING	IP66		




PURE ECO RANGE

Outdoor LED Sports Lights




Eco Sports Flood

- PLESF600** - 600W
- PLESF800** - 800W

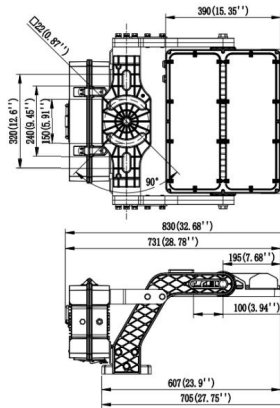

Eco Sports Flood

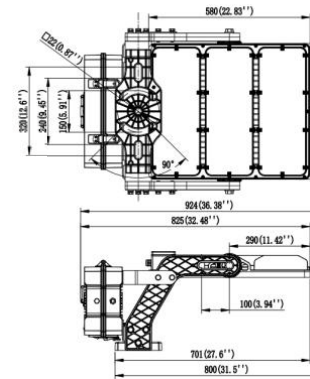


- PLESF1000** - 1000W
- PLESF1200** - 1200W



PRODUCT FEATURES

- Powder coated aluminium alloy with glass/PC optical lenses
- Multiple optic options to minimise spill and control glare
- Driver on board option
- Vertical and horizontal adjustable
- High lumen output

TECHNICAL SPECIFICATIONS


PRODUCT	Eco Sports Range				IK RATING	IK08
ORDERING CODE	PLESF600	PLESF800	PLESF1000	PLESF1200	BEAM ANGLE	See optic options
POWER	600W	800W	1000W	1200W	DIMMING	Dimmable, DALI and DMX Options
FITTING COLOUR	Black				VOLTAGE	AC220-240V
CCT	5000K (4000K, 5700K optional)				POWER FACTOR	0.92
LUMEN OUTPUT	140lm/W and 160lm/W - See optic options				LED TYPE	LED 3737 / LED 5050
LAMP WEIGHT	26Kg	29.8Kg	33.2Kg	33.2Kg	OPERATING TEMP	-30°~+40°C
CRI	Ra>70 (Ra>80 and Ra>90 optional)				CERTIFICATIONS	  
IP RATING	IP66					




PURE ECO RANGE

Outdoor LED Sports Light Optics and Accessories


OPTIC OPTIONS

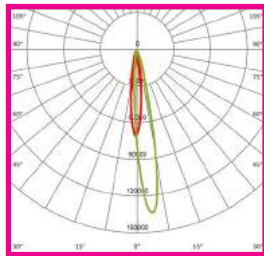


PLES1
LED3737 140lm/W

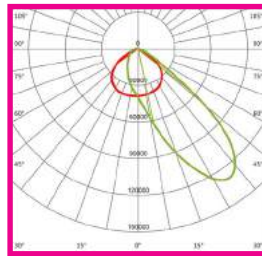


PLES2
LED5050 160lm/W

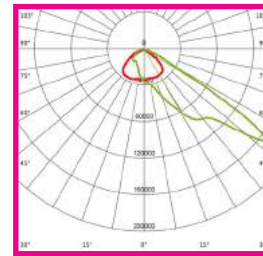


PLES3
LED3737 140lm/W

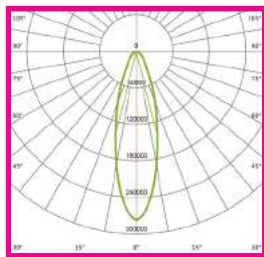


PLES4
LED5050 160lm/W

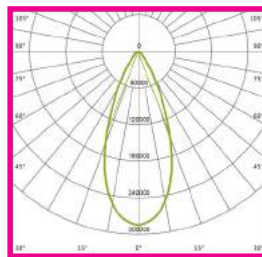

PLES5
LED5050 160lm/W

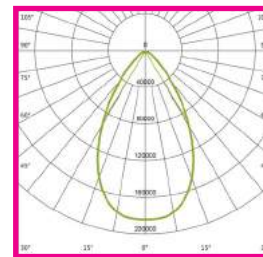

PLES6
LED5050 160lm/W

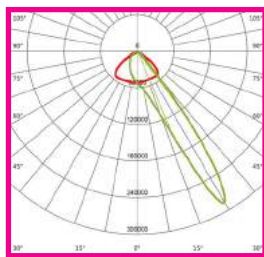

PLES8
LED3737 140lm/W

GLARE / SPILL CONTROL & ACCESSORIES



PLESV1
Down light control



PLESV2
Up & Side light control



PLESV3
Up light control




PLESSC
Safety Rope

PURE PLATINUM RANGE


Outdoor LED Sports Lights




600W Sports Flood
PLSFL600

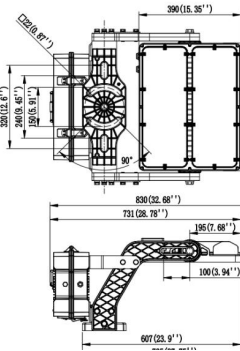

1200W Sports Flood
PLSFL1200

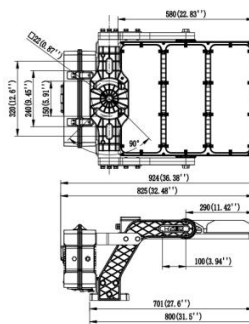

1800W Sports Flood
PLSFL1800

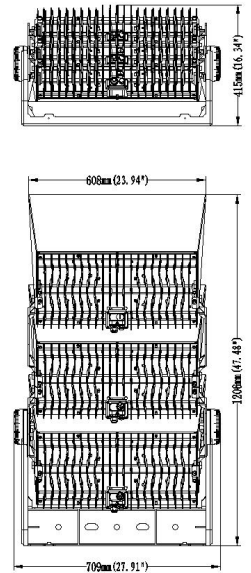

PRODUCT FEATURES

- Powder coated aluminium alloy with PC optical lenses
- Multiple optic options to minimise spill and control glare
- Driver on board option
- Visors optional for light control
- High lumen output

TECHNICAL SPECIFICATIONS


PRODUCT	Platinum Range Sports Flood			IK RATING	IK08
ORDERING CODE	PLSFL600	PLSFL1200	PLSFL1800	BEAM ANGLE	See optic options
POWER	600W	1200W	1800W	DIMMING	Constant Current, DALI and DMX Options
FITTING COLOUR	Black			VOLTAGE	AC220-240V
CCT	5700K (3000K, 4000K optional)			POWER FACTOR	0.92
LUMEN OUTPUT	130lm/W and 150lm/W - See optic options			LED TYPE	LED 3737 / LED 5050
LAMP WEIGHT	8.8Kg	21Kg	36.7Kg	OPERATING TEMP	-30°~+45°C
CRI	Ra>70 (Ra>80 and Ra>90 optional)			CERTIFICATIONS	
IP RATING	IP66				




PURE PLATINUM RANGE

Outdoor LED Sports Light Optics and Accessories


OPTIC OPTIONS

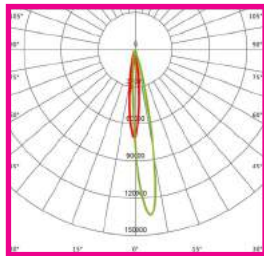


PLSF1
LED3737 130lm/W

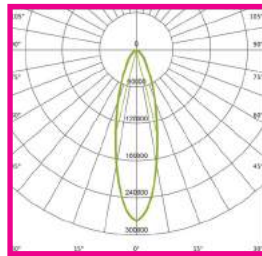


PLSF2
LED3737 130lm/W

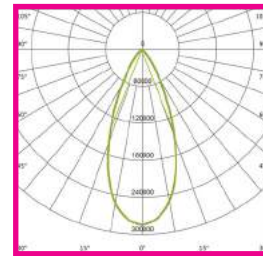


PLSF3
LED3737 130lm/W

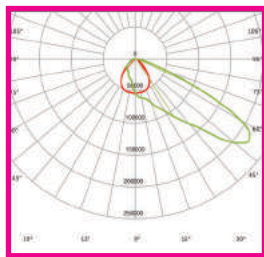

PLSF4
LED5050 150lm/W

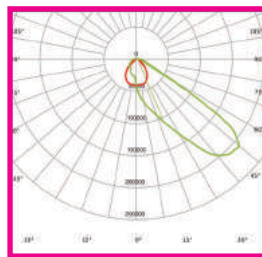

PLSF5
LED5050 150lm/W

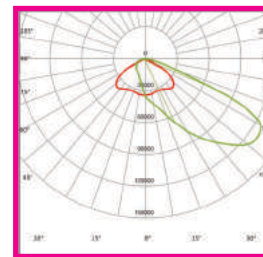

PLSF6
LED5050 150lm/W



1800W Sports Flood with Visors
PLSFL1800 + PLSFV2

GLARE / SPILL CONTROL & ACCESSORIES



PLSFV1
Up light control for
PLSF1, PLSF3
PLSF4, PLSF6



PLSFV2
Up light control for
PLSF2, PLSF5




PLESSC
Safety Rope

PURE SPORTS COURT RANGE


Outdoor LED Sports Lights



450W Sports Court Flood
PLSCF450

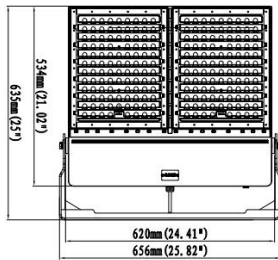

600W Sports Court Flood
PLSCF600

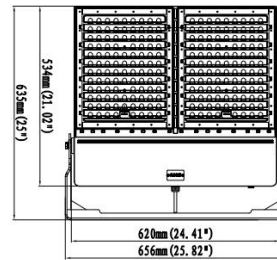

PRODUCT FEATURES

- Powder coated aluminium alloy with PC optical lenses
- Multiple optic options to minimise spill and control glare
- Adjustable U-bracket for easy installation
- High lumen output

TECHNICAL SPECIFICATIONS


PRODUCT	Sports Court Flood		IK RATING	IK10
ORDERING CODE	PLSCF450	PLSCF600	BEAM ANGLE	See optic options
POWER	450W	600W	DIMMING	Non-dimmable
FITTING COLOUR	Black		VOLTAGE	AC220-240V
CCT	5000K (3000K, 4000K optional)		POWER FACTOR	0.95
LUMEN OUTPUT	67500lm	90000lm	LED TYPE	LED 5050
WEIGHT	15.7Kg		OPERATING TEMP	-30°~+50°C
CRI	Ra>70		CERTIFICATIONS	
IP RATING	IP66			




PURE SPORTS COURT RANGE

Outdoor LED Sports Light Optics and Accessories


OPTIC OPTIONS

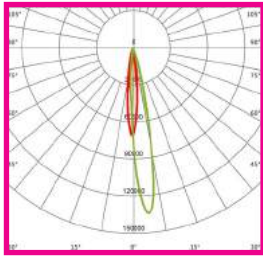


PLSC1

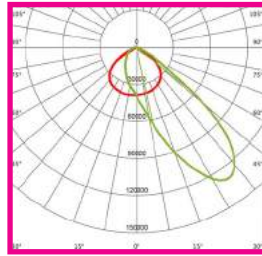


PLSC2

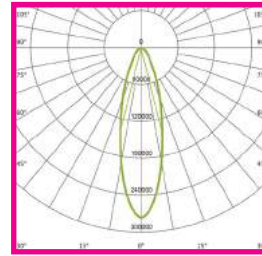


PLSC3

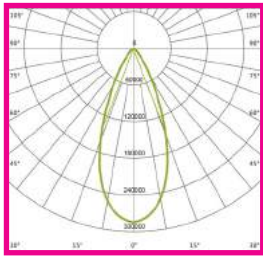


PLSC4

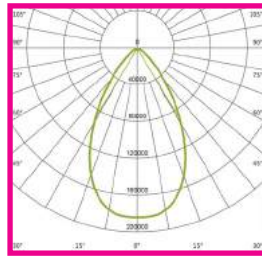


PLSC5

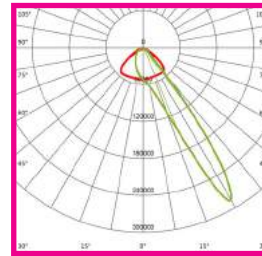


PLSC6

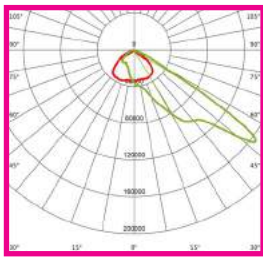

PLSC7

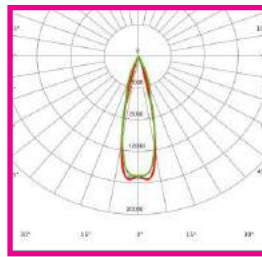

PLSC8

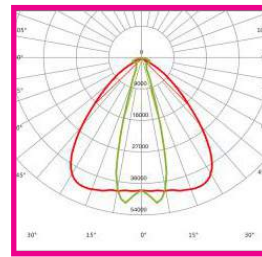

PLSC9


GLARE / SPILL CONTROL & ACCESSORIES



PLSCS
Spill Control Shield



PLESSC
Safety Rope

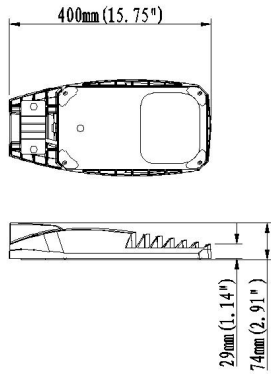

15W Eco Street Light
PLESL15

20W Eco Street Light
PLESL20

30W Eco Street Light
PLESL30

40W Eco Street Light
PLESL40

PRODUCT FEATURES

- Thermal conductive plastics with PC optical lens
- Beam angle options available
- Fixed side entry with a Ø60mm spigot
- Standard stock with PLST2 optics

TECHNICAL SPECIFICATIONS


PRODUCT	Eco Street Lights				IK RATING	IK08
ORDERING CODE	PLESL15	PLESL20	PLESL30	PLESL40	BEAM ANGLE	See optic options
POWER	15W	20W	30W	40W	DIMMING	Non-dimmable
FITTING COLOUR	Black				VOLTAGE	AC220-240V
CCT	4000K (3000K, 5000K optional)				POWER FACTOR	0.92
LUMEN OUTPUT	2100lm	2800lm	4200lm	7000lm	LED TYPE	LED2835
SPIGOT	Ø60mm				OPERATING TEMP	-20°~+50°C
CRI	Ra>70 (Ra>80 optional)				CERTIFICATIONS	
IP RATING	IP66					




PURE ECO RANGE

LED Street Light Optics


OPTIC OPTIONS

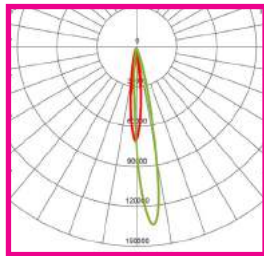


PLST1

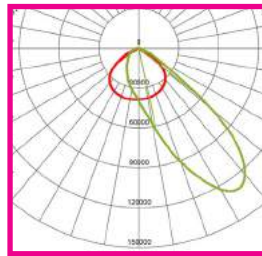


PLST2

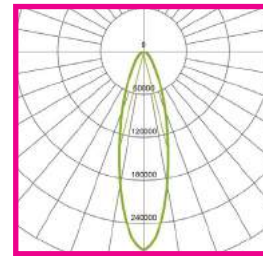


PLST3

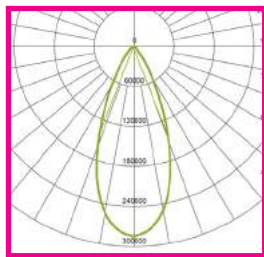


PLST4

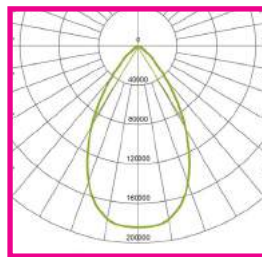


PLST5

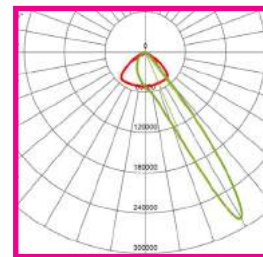


PLST6

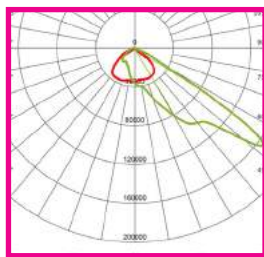


PLST7

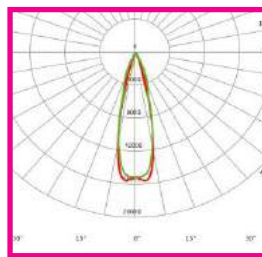

PLST8

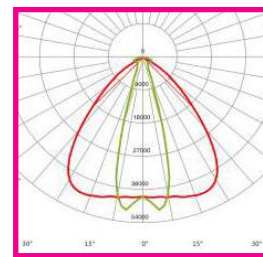

PLST9

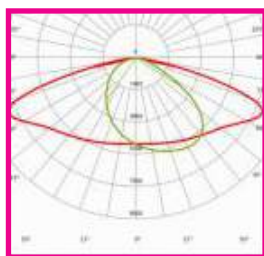


PLST10

PURE PLATINUM RANGE


LED Street Lights




40W Street Light
PL40WSFL

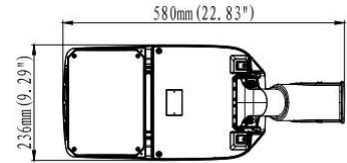

60W Street Light
PL60WSFL

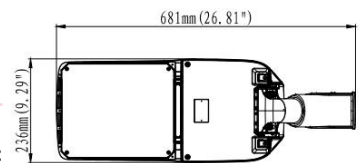

100W Street Light
PL100WSFL

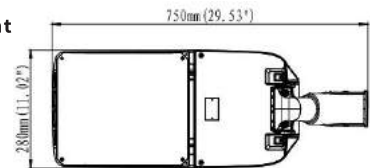

150W Street Light
PL150WSFL

PRODUCT FEATURES

- Powder coated aluminium alloy body with PC lens or glass cover
- 15° adjustable
- Beam angle options available
- Pole mount or side mount entry

TECHNICAL SPECIFICATIONS


PRODUCT	Platinum Street Light				IK RATING	IK09
ORDERING CODE	PL40WSFL	PL60WSFL	PL100WSFL	PL150WSFL	BEAM ANGLE	See optic options
POWER	40W	60W	100W	150W	DIMMING	Non-dimmable (options available)
FITTING COLOUR	Silver				VOLTAGE	AC220-240V
CCT	4000K (3000K, 5000K optional)				POWER FACTOR	0.94
LUMEN OUTPUT	6400lm	9600lm	16000lm	24000lm	LED TYPE	LED 3030
SPIGOT	Ø60mm				OPERATING TEMP	-30°~+50°C
CRI	Ra>70 (Ra>80 optional)				CERTIFICATIONS	
IP RATING	IP66					




PURE PLATINUM RANGE

LED Street Light Optics


OPTIC OPTIONS

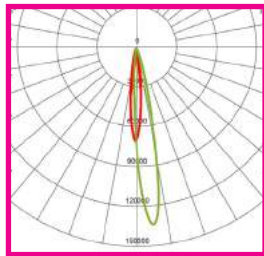


PLST1

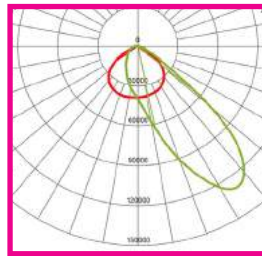


PLST2

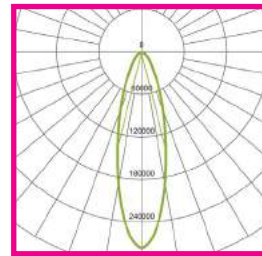


PLST3

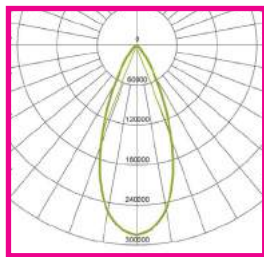


PLST4

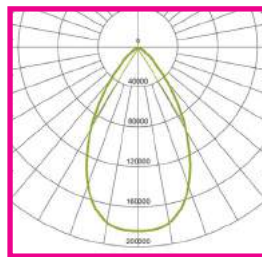


PLST5

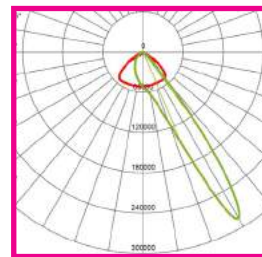


PLST6

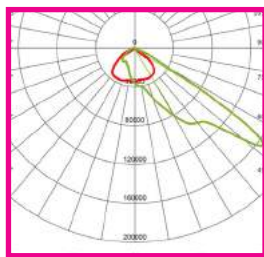


PLST7

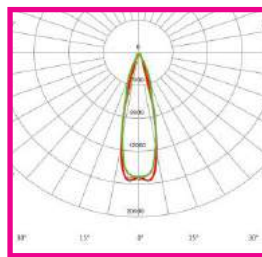

PLST8

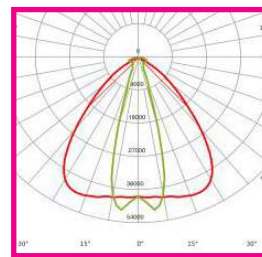

PLST9

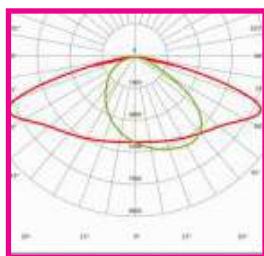

PLST10


MOUNTING ACCESSORIES



PLSTWM
Wall Mount

STREET LIGHTING • FLOODLIGHTING • CARPARKS • SPORTS LIGHTING

We provide pole solutions for sports lighting, street lighting, carpark lighting and more. With our partners we have over 20 years of experience in the pole industry to assist with any project. Our focus is to offer quality lighting structures with service and delivery a priority. Communication is key, we work with our clients through the project, from design, delivery and installation.




MANUFACTURING

- High quality materials
- GR 50/55/65 low silicon steel for strength and durability
- Mill certified plate steel
- Manufacturing certifications
- ISO 9001:2015 certified manufacturing facility
- Quality control and inspection



QUALITY CONTROL


With our partners we have made a commitment that quality will never be compromised. Our high quality manufacturing process will be upheld. We are always striving to raise the bar and improve on our already outstanding quality.



DESIGN

The following analyses are done according to loading and structural features:

- Static Analysis
- Strength Check
- Deflection Calculations
- Dynamic Analysis
- Fatigue Check
- Frequency Calculation

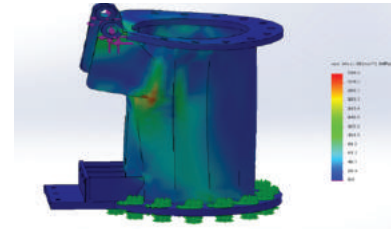



HIGH BAYS & CANOPY LIGHTS

High bay lights are powerful lighting fixtures that are specifically designed to provide bright, uniform illumination in indoor spaces with high ceilings, such as warehouses, distribution centers, commercial spaces and sports facilities.


High bay lights are typically mounted on ceilings or walls, and they provide a broad spread of light, making them ideal for illuminating large areas with high quality light.

PURE High Bay Range	73
PURE Eco Range High Bay.....	75
PURE Platinum Range Linear High Bay	76
PURE Linear High Bay	77
PURE Canopy Light.....	78




PURE HIGH BAY RANGE


UFO LED High Bay Lights

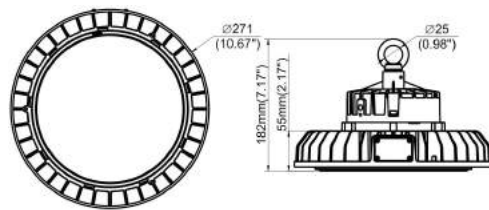

150W UFO High Bay
PL-UF-150W



200W UFO High Bay
PL-UF-200W



PRODUCT FEATURES

- Powder coated aluminium body with PC lens
- Loop hanging or ceiling mount options
- Compact size and light weight for easy installation

MOUNTING ACCESSORIES



PLHBD
PC Reflector



PLHBD A
Aluminium Reflector



PLUFBR
Ceiling Mount



PLHBSC
Safety Chain

TECHNICAL SPECIFICATIONS

PRODUCT	UFO High Bay	IK RATING	IK08
ORDERING CODE	PL-UF-150W	BEAM ANGLE	120°
POWER	150W	DIMMING	Non-dimmable (options available)
FITTING COLOUR	Black	VOLTAGE	AC220-240V
CCT	5000K	POWER FACTOR	0.98
LUMEN OUTPUT	19500lm	LED TYPE	SMD 3030
LAMP WEIGHT	3Kg	OPERATING TEMP	-30°~+45°C
CRI	Ra>70	CERTIFICATIONS	ROHS CE SAA
IP RATING	IP65		



Non-dimmable



CCT



Warranty



IP Rating









Lifespan

PURE HIGH BAY RANGE

Power and CCT Switchable UFO LED High Bay Light

Switchable UFO High Bay
PL-SHB-120-200W

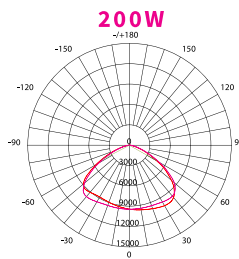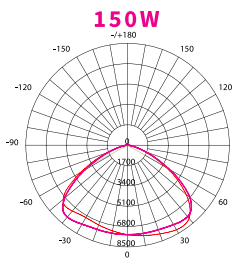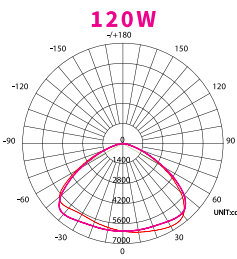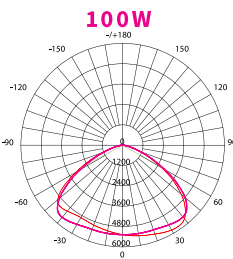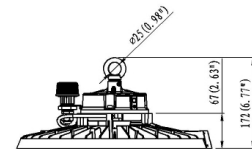

Emergency Driver available see page 88 in PURE Emergency Range

PRODUCT FEATURES

- Powder coated aluminium body with PC lens
- Power selectable 100W, 120W, 150W, 200W and CCT selectable 4000K, 5000K
- Loop hanging or ceiling mount options
- 0-10V dimming

MOUNTING ACCESSORIES



PLSHBD
PC Reflector



PLSHBDA
Aluminium Reflector



PLSHBR
Ceiling Mount



PLHBSC
Safety Chain

TECHNICAL SPECIFICATIONS

PRODUCT	Switchable UFO High Bay	IK RATING	IK08
ORDERING CODE	PL-SHB-120-200W	BEAM ANGLE	120°
POWER	100W, 120W, 150W, 200W selectable	DIMMING	0-10V dimming
FITTING COLOUR	Black	VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 5000K	POWER FACTOR	0.95
LUMEN OUTPUT	160lm/W (4000K) 150lm/W(5000K)	LED TYPE	LED 2835
LAMP WEIGHT	3Kg	OPERATING TEMP	-30°~+50°C
CRI	Ra>70	CERTIFICATIONS	
IP RATING	IP65		






PURE ECO RANGE

UFO LED High Bay Lights



200W Eco High Bay
PLEHB200W



PRODUCT FEATURES

- Powder coated aluminium body with PC lens
- Loop hanging
- High lumen output

MOUNTING ACCESSORIES



PLHBS
Safety Chain

TECHNICAL SPECIFICATIONS

PRODUCT	Eco UFO High Bay	IK RATING	IK08
ORDERING CODE	PLEHB200W	BEAM ANGLE	120°
POWER	200W	DIMMING	Non-dimmable
FITTING COLOUR	Black	VOLTAGE	AC220-240V
CCT	5000K	POWER FACTOR	0.92
LUMEN OUTPUT	29000lm	LED TYPE	LED 2835
LAMP WEIGHT	1.9Kg	OPERATING TEMP	-30°~+45°C
CRI	Ra>80	CERTIFICATIONS	
IP RATING	IP65		






PURE PLATINUM RANGE

Linear LED High Bay Light



200W Platinum Linear High Bay
PLPHB200

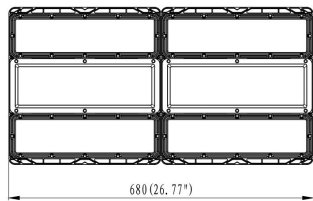

PRODUCT FEATURES

- Powder coated aluminium body with PC lens
- Low glare
- Loop hanging or ceiling mount options
- Standard non-dimmable, dimming and smart control options available

MOUNTING ACCESSORIES



PLPHBS
Suspension Chain



PLPHBB
60° Rotatable Bracket



PLPHBSR
Safety Rope

TECHNICAL SPECIFICATIONS

PRODUCT	Platinum Linear High Bay	IK RATING	IK10
ORDERING CODE	PLPHB200	BEAM ANGLE	120° (options available)
POWER	200W	DIMMING	Non-dimmable (options available)
FITTING COLOUR	Black	VOLTAGE	AC220-240V
CCT	5000K	POWER FACTOR	0.91
LUMEN OUTPUT	32000lm	LED TYPE	LED 3030
LAMP WEIGHT	7Kg	OPERATING TEMP	-30°~+50°C
CRI	Ra>70	CERTIFICATIONS	
IP RATING	IP66		




PURE HIGH BAY RANGE

Linear LED High Bay Lights



200W Linear High Bay
CW-HBZ-200W



PRODUCT FEATURES

- Aluminium body with PC lens
- Loop hanging
- High lumen output

MOUNTING ACCESSORIES



PLHBC
Safety Chain

TECHNICAL SPECIFICATIONS

PRODUCT	Linear High Bay	IK RATING	IK08
ORDERING CODE	CW-HBZ-200W	BEAM ANGLE	120°
POWER	200W	DIMMING	Non-dimmable
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	6000K	POWER FACTOR	0.95
LUMEN OUTPUT	21000lm	LED TYPE	LED 2835
LAMP WEIGHT	7Kg	OPERATING TEMP	-20°~+40°C
CRI	Ra>80	CERTIFICATIONS	
IP RATING	IP40		





PURE CANOPY LIGHT

LED Canopy Light



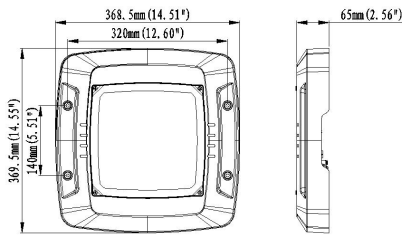


120W Canopy Light
PLCL120W



PRODUCT FEATURES

- Powder coated aluminium body with tempered glass lens
- Surface mount
- High lumen output
- Ideal for petrol stations

TECHNICAL SPECIFICATIONS

PRODUCT	Canopy Light	IK RATING	IK08
ORDERING CODE	PLCL120W	BEAM ANGLE	90°
POWER	120W	DIMMING	Non-dimmable
FITTING COLOUR	White	VOLTAGE	AC220-240V
CCT	4000K	POWER FACTOR	0.9
LUMEN OUTPUT	18000lm	LED TYPE	LED 2835
LAMP WEIGHT	4Kg	OPERATING TEMP	-30°~+50°C
CRI	Ra>70	CERTIFICATIONS	  
IP RATING	IP65		





EMERGENCY LIGHTING

Emergency lighting is essential for the safety of occupants during an emergency such as a fire, power outage or other unforeseen event. PURE offers a range of both exit lights and emergency lights that meet the AS/NZS safety regulations.

PURE Emergency Range Exit Lights.....	81
PURE Emergency Range Emergency Lights	84
Pure Emergency Batten.....	87
PURE High Bay Emergency Driver	88




PURE EMERGENCY RANGE


LED Exit Lights



Surface Mount Exit Light
PLEX1W

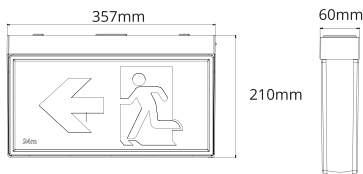

Surface Mount Blade Exit Light
PLEX2W

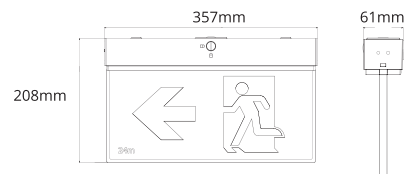

PRODUCT FEATURES

- AS/NZS compliant
- Long-life LiFePO4 battery
- 24M Classification
- Double Sided
- Maintained

DIRECTIONAL SIGNS INCLUDED



TECHNICAL SPECIFICATIONS

PRODUCT	Surface Mount	Surface Mount Blade	IK RATING	IK06
ORDERING CODE	PLEX1W	PLEX2W	TEST MODE	Manual test
POWER	1W		DIMMING	Non-dimmable
FITTING COLOUR	White		VOLTAGE	AC220-240V
CHARGE	16 Hours		POWER FACTOR	0.3
DISCHARGE	>2 Hours		LED TYPE	SMD2835
CLASSIFICATION	24m		OPERATING TEMP	-0°~+45°C
BATTERY	LiFePO4 3.2V600mAh		CERTIFICATIONS	
IP RATING	IP20			




PURE EMERGENCY RANGE

Jumbo LED Exit Lights



Jumbo Exit Light
PLEX4JW

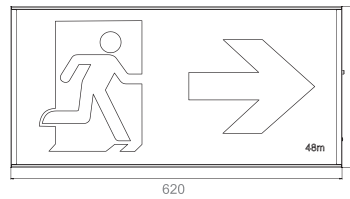




PRODUCT FEATURES

- AS/NZS compliant
- Long-life LiFePO4 battery
- 48M Classification
- Single Sided
- Maintained

DIRECTIONAL SIGNS INCLUDED



TECHNICAL SPECIFICATIONS

PRODUCT	Jumbo Exit	IK RATING	IK06
ORDERING CODE	PLEX4JW	TEST MODE	Manual test
POWER	5W	DIMMING	Non-dimmable
FITTING COLOUR	White	VOLTAGE	AC220-240V
CHARGE	16 Hours	POWER FACTOR	0.9
DISCHARGE	>2 Hours	LED TYPE	SMD2835
CLASSIFICATION	48m	OPERATING TEMP	-0°~+45°C
BATTERY	LiFePO4 6.4V3200mAh	CERTIFICATIONS	  
IP RATING	IP20		




PURE EMERGENCY RANGE

IP65 LED Exit Lights



IP65 Surface Mount Exit Light
PLEX3WIP

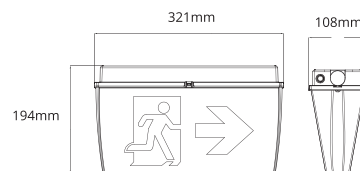




PRODUCT FEATURES

- AS/NZS compliant
- IP65 rated
- Long-life LiFePO4 battery
- 24M Classification
- Double Sided
- Maintained

DIRECTIONAL SIGNS INCLUDED



TECHNICAL SPECIFICATIONS

PRODUCT	IP65 Exit Light	IK RATING	IK06
ORDERING CODE	PLEX3WIP	TEST MODE	Manual test
POWER	2W	DIMMING	Non-dimmable
FITTING COLOUR	White	VOLTAGE	AC220-240V
CHARGE	16 Hours	POWER FACTOR	0.3
DISCHARGE	>2 Hours	LED TYPE	SMD2835
CLASSIFICATION	24m	OPERATING TEMP	-0°~+45°C
BATTERY	LiFePO4 6.4V1500mAh	CERTIFICATIONS	  
IP RATING	IP65		




PURE EMERGENCY RANGE


LED Emergency Lights



Recessed Emergency Light
PLEM3W

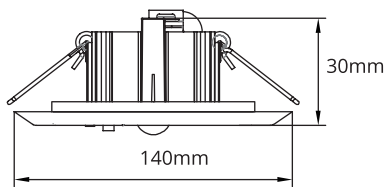

Surface Emergency Light
PLEM2W

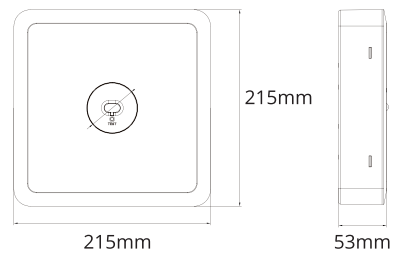

PRODUCT FEATURES

- AS/NZS compliant
- Long-life LiFePO4 battery
- D63 classification
- Non-maintained

TECHNICAL SPECIFICATIONS

PRODUCT	Recessed Mount	Surface Mount	FITTING COLOUR	White
ORDERING CODE	PLEM3W	PLEM2W	TEST MODE	Manual test
POWER	3W		DIMMING	Non-dimmable
LUMEN OUTPUT	280lm		VOLTAGE	AC220-240V
CHARGE	16 Hours		POWER FACTOR	0.3
DISCHARGE	>2 Hours		LED TYPE	SMD2835
CLASSIFICATION	D63		OPERATING TEMP	-0°~+45°C
BATTERY	LiFePO4 6.4V1500mAh		CERTIFICATIONS	
IP RATING	IP20			




PURE EMERGENCY RANGE


IP65 LED Emergency Lights



IP65 Recessed Emergency Light
PLEM4WIP

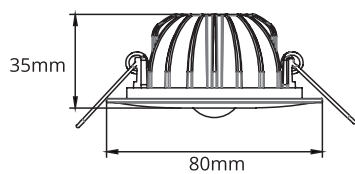

IP65 Surface Emergency Light
PLEM5WIP

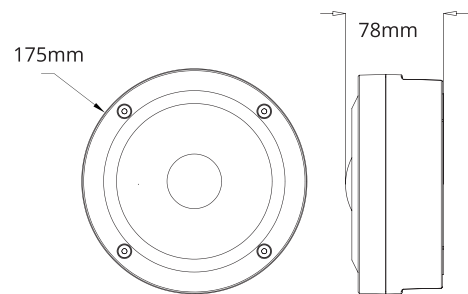

PRODUCT FEATURES

- AS/NZS compliant
- Long-life LiFePO4 battery
- D63 classification
- Non-maintained
- IP65 rated

TECHNICAL SPECIFICATIONS

PRODUCT	Recessed Mount	Surface Mount	FITTING COLOUR	White
ORDERING CODE	PLEM4WIP	PLEM5WIP	TEST MODE	Manual test
POWER	3W		DIMMING	Non-dimmable
LUMEN OUTPUT	750lm	500lm	VOLTAGE	AC220-240V
CHARGE	16 Hours		POWER FACTOR	0.3
DISCHARGE	>2 Hours		LED TYPE	SMD2835
CLASSIFICATION	D63		OPERATING TEMP	-0°~+45°C
BATTERY	LiFePO4 6.4V1500mAh		CERTIFICATIONS	
IP RATING	IP65			



Non-dimmable



Distance



Warranty




IP Rating




Discharge

PURE EMERGENCY RANGE

LED Emergency Spotlight

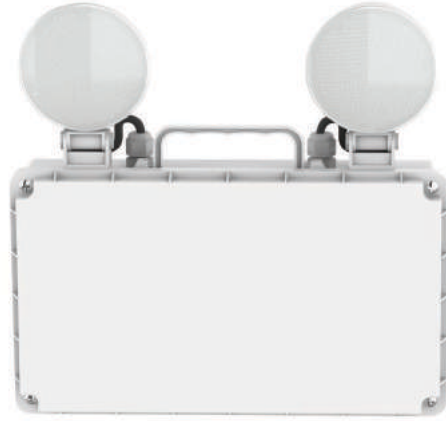

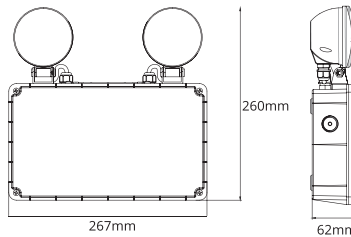


IP65 Emergency Spotlight
PLEMF5W



PRODUCT FEATURES

- AS/NZS compliant
- Long-life LiFePO4 battery
- D160 classification
- Non-maintained
- IP65 rated

TECHNICAL SPECIFICATIONS

PRODUCT	IP65 Emergency Spotlight	FITTING COLOUR	White
ORDERING CODE	PLEMF5W	TEST MODE	Manual test
POWER	9W	DIMMING	Non-dimmable
LUMEN OUTPUT	1200lm	VOLTAGE	AC220-240V
CHARGE	24 Hours	POWER FACTOR	0.9
DISCHARGE	>3 Hours	LED TYPE	SMD2835
CLASSIFICATION	160m	OPERATING TEMP	-0°~+45°C
BATTERY	LiFePO4 6.4V6000mAh	CERTIFICATIONS	  
IP RATING	IP65		




PURE EMERGENCY RANGE

LED Emergency Batten Light



50W Emergency Batten Light
PL-U150-50WEM

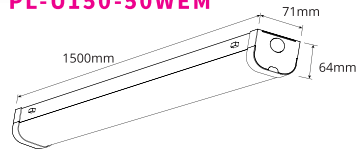

PRODUCT FEATURES

- Low profile slim batten light
- Metal housing with PC diffuser and remote driver
- 4 Fast release buttons for easy installation
- CCT selectable 4000K, 6000K

EMERGENCY SPECIFICATIONS

CHARGE	24 hours
DISCHARGE	>3 hours
EM. POWER	3W
LUMEN OUTPUT	3300lm



TECHNICAL SPECIFICATIONS

PRODUCT	Emergency Batten
ORDERING CODE	PL-U150-50WEM
POWER	50W
FITTING COLOUR	White
CCT	CCT Switch 4000K, 6000K
LUMEN OUTPUT	5500-6100lm
DIMENSIONS	1500 X 71 X 64mm
CRI	Ra>80
IP RATING	IP20
IK RATING	IK08
BEAM ANGLE	120°
DIMMING	Non-dimmable
VOLTAGE	AC220-240V
POWER FACTOR	0.9
LED TYPE	SMD
OPERATING TEMP	-20°~+45°C
CERTIFICATIONS	




PURE EMERGENCY RANGE

LED High Bay Emergency Driver Kit



Emergency Driver for PL-SHB-120-200W
PLSHBED

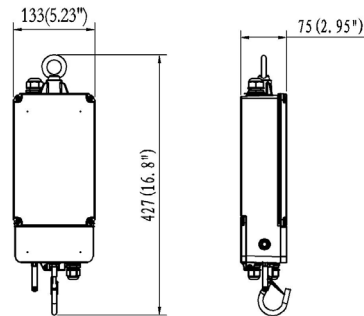

PRODUCT FEATURES

- When switched to emergency operation power is cut to 10% of normal output
- Can be used with 0-10V dimmable high bay
- High output power
- Self-testing
- Battery over-temperature protection

EMERGENCY SPECIFICATIONS

PRODUCT	Emergency Driver	MATERIAL	Powder coated aluminium body
ORDERING CODE	PLSHBED	BATTERY	LiFePO4
POWER	10% of normal output	COLOUR	Black
VOLTAGE	AC220-240V	OPERATING TEMP	0°C ~+45°C
CHARGE	24 hours	IK RATING	IK08
DISCHARGE	>3 hours	IP RATING	IP65
DIMENSIONS	427 x 133 x75mm	CERTIFICATIONS	
WEIGHT	2.5Kg		
MOUNTING	Loop mounting		





CEILING FANS

Ceiling fans are a popular and effective way to manage indoor temperature, improve ventilation and enhance the aesthetics of a room. Equipped with a reversible motor for Summer / Winter they offer year round functionality.

Link Range AC Ceiling Fans	91
Link Range DC Ceiling Fans	93



LINK RANGE

AC Ceiling Fans



Link AC Ceiling fan
FSL124M - Black



Link AC Ceiling fan
FSL124W - White

PRODUCT FEATURES

- 4-blade 1220mm diameter
- Metal body with plywood blades
- Remote adaptable MPREM
- Hangsure canopy up to 15° pitch
- Summer / Winter switch on fan

TECHNICAL SPECIFICATIONS

PRODUCT	Link AC Ceiling Fan	
ORDERING CODE	FSL124M	FSL124W
POWER	55W	
FITTING COLOUR	Black	White
MOTOR	AC	
FAN DIAMETER	1220mm	
FAN HEIGHT	307mm	
AIRFLOW	7600m ³ /hr	
BLADE PITCH	11°	

LUMEN OUTPUT	Light model only
CCT	Light model only
LED POWER	Light model only
CONTROL	3-Speed wall control
VOLTAGE	AC220-240V



Warranty

LINK RANGE

AC Ceiling Fans with LED



Link AC Ceiling fan with LED
FSL1243M - Black



Link AC Ceiling fan with LED
FSL1243W - White

PRODUCT FEATURES

- 4-blade 1220mm diameter
- Metal body with plywood blades
- Remote adaptable MPREM
- Hangsure canopy up to 15° pitch
- Summer / Winter switch on fan

TECHNICAL SPECIFICATIONS

PRODUCT	Link AC Ceiling Fan with LED	
ORDERING CODE	FSL1243M	FSL1243W
POWER	55W	
FITTING COLOUR	Black	White
MOTOR	AC	
FAN DIAMETER	1220mm	
FAN HEIGHT	352mm	
AIRFLOW	7600m ³ /hr	
BLADE PITCH	11°	

LUMEN OUTPUT	1450-1650lm
CCT	CCT Switch 3000K, 4000K, 5000K
LED POWER	15W
CONTROL	3-Speed wall control
VOLTAGE	AC220-240V



LINK RANGE

DC Ceiling Fans



Link DC Ceiling fan
FSLDC124MR - Black



Link DC Ceiling fan
FSLDC124WR - White

PRODUCT FEATURES

- 4-blade 1220mm diameter
- Metal body with plywood blades and PC diffuser
- Comes with remote
- Hangsure canopy up to 15° pitch
- Summer / Winter switch on remote

TECHNICAL SPECIFICATIONS

PRODUCT	Link DC Ceiling Fan	
ORDERING CODE	FSLDC124MR	FSLDC124WR
POWER	30W	
FITTING COLOUR	Black	White
MOTOR	DC	
FAN DIAMETER	1220mm	
FAN HEIGHT	307mm	
AIRFLOW	9800m ³ /hr	
BLADE PITCH	11°	

LUMEN OUTPUT	Light model only
CCT	Light model only
LED POWER	Light model only
CONTROL	Remote control
VOLTAGE	AC220-240V



Warranty

LINK RANGE

DC Ceiling Fans with LED



Link DC Ceiling fan with LED
FSLDC1243MR - Black



Link DC Ceiling fan with LED
FSLDC1243WR - White

PRODUCT FEATURES


- 4-blade 1220mm diameter
- Metal body with plywood blades and PC diffuser
- Comes with remote
- Hangsure canopy up to 15° pitch
- Summer / Winter switch on remote

TECHNICAL SPECIFICATIONS

PRODUCT	Link DC Ceiling Fan with LED	
ORDERING CODE	FSLDC1243MR	FSLDC1243WR
POWER	30W	
FITTING COLOUR	Black	White
MOTOR	DC	
FAN DIAMETER	1220mm	
FAN HEIGHT	352mm	
AIRFLOW	9800m ³ /hr	
BLADE PITCH	11°	

LUMEN OUTPUT	1450-1650lm
CCT	CCT Switch 3000K, 4000K, 5000K
LED POWER	15W
CONTROL	Remote control
VOLTAGE	AC220-240V



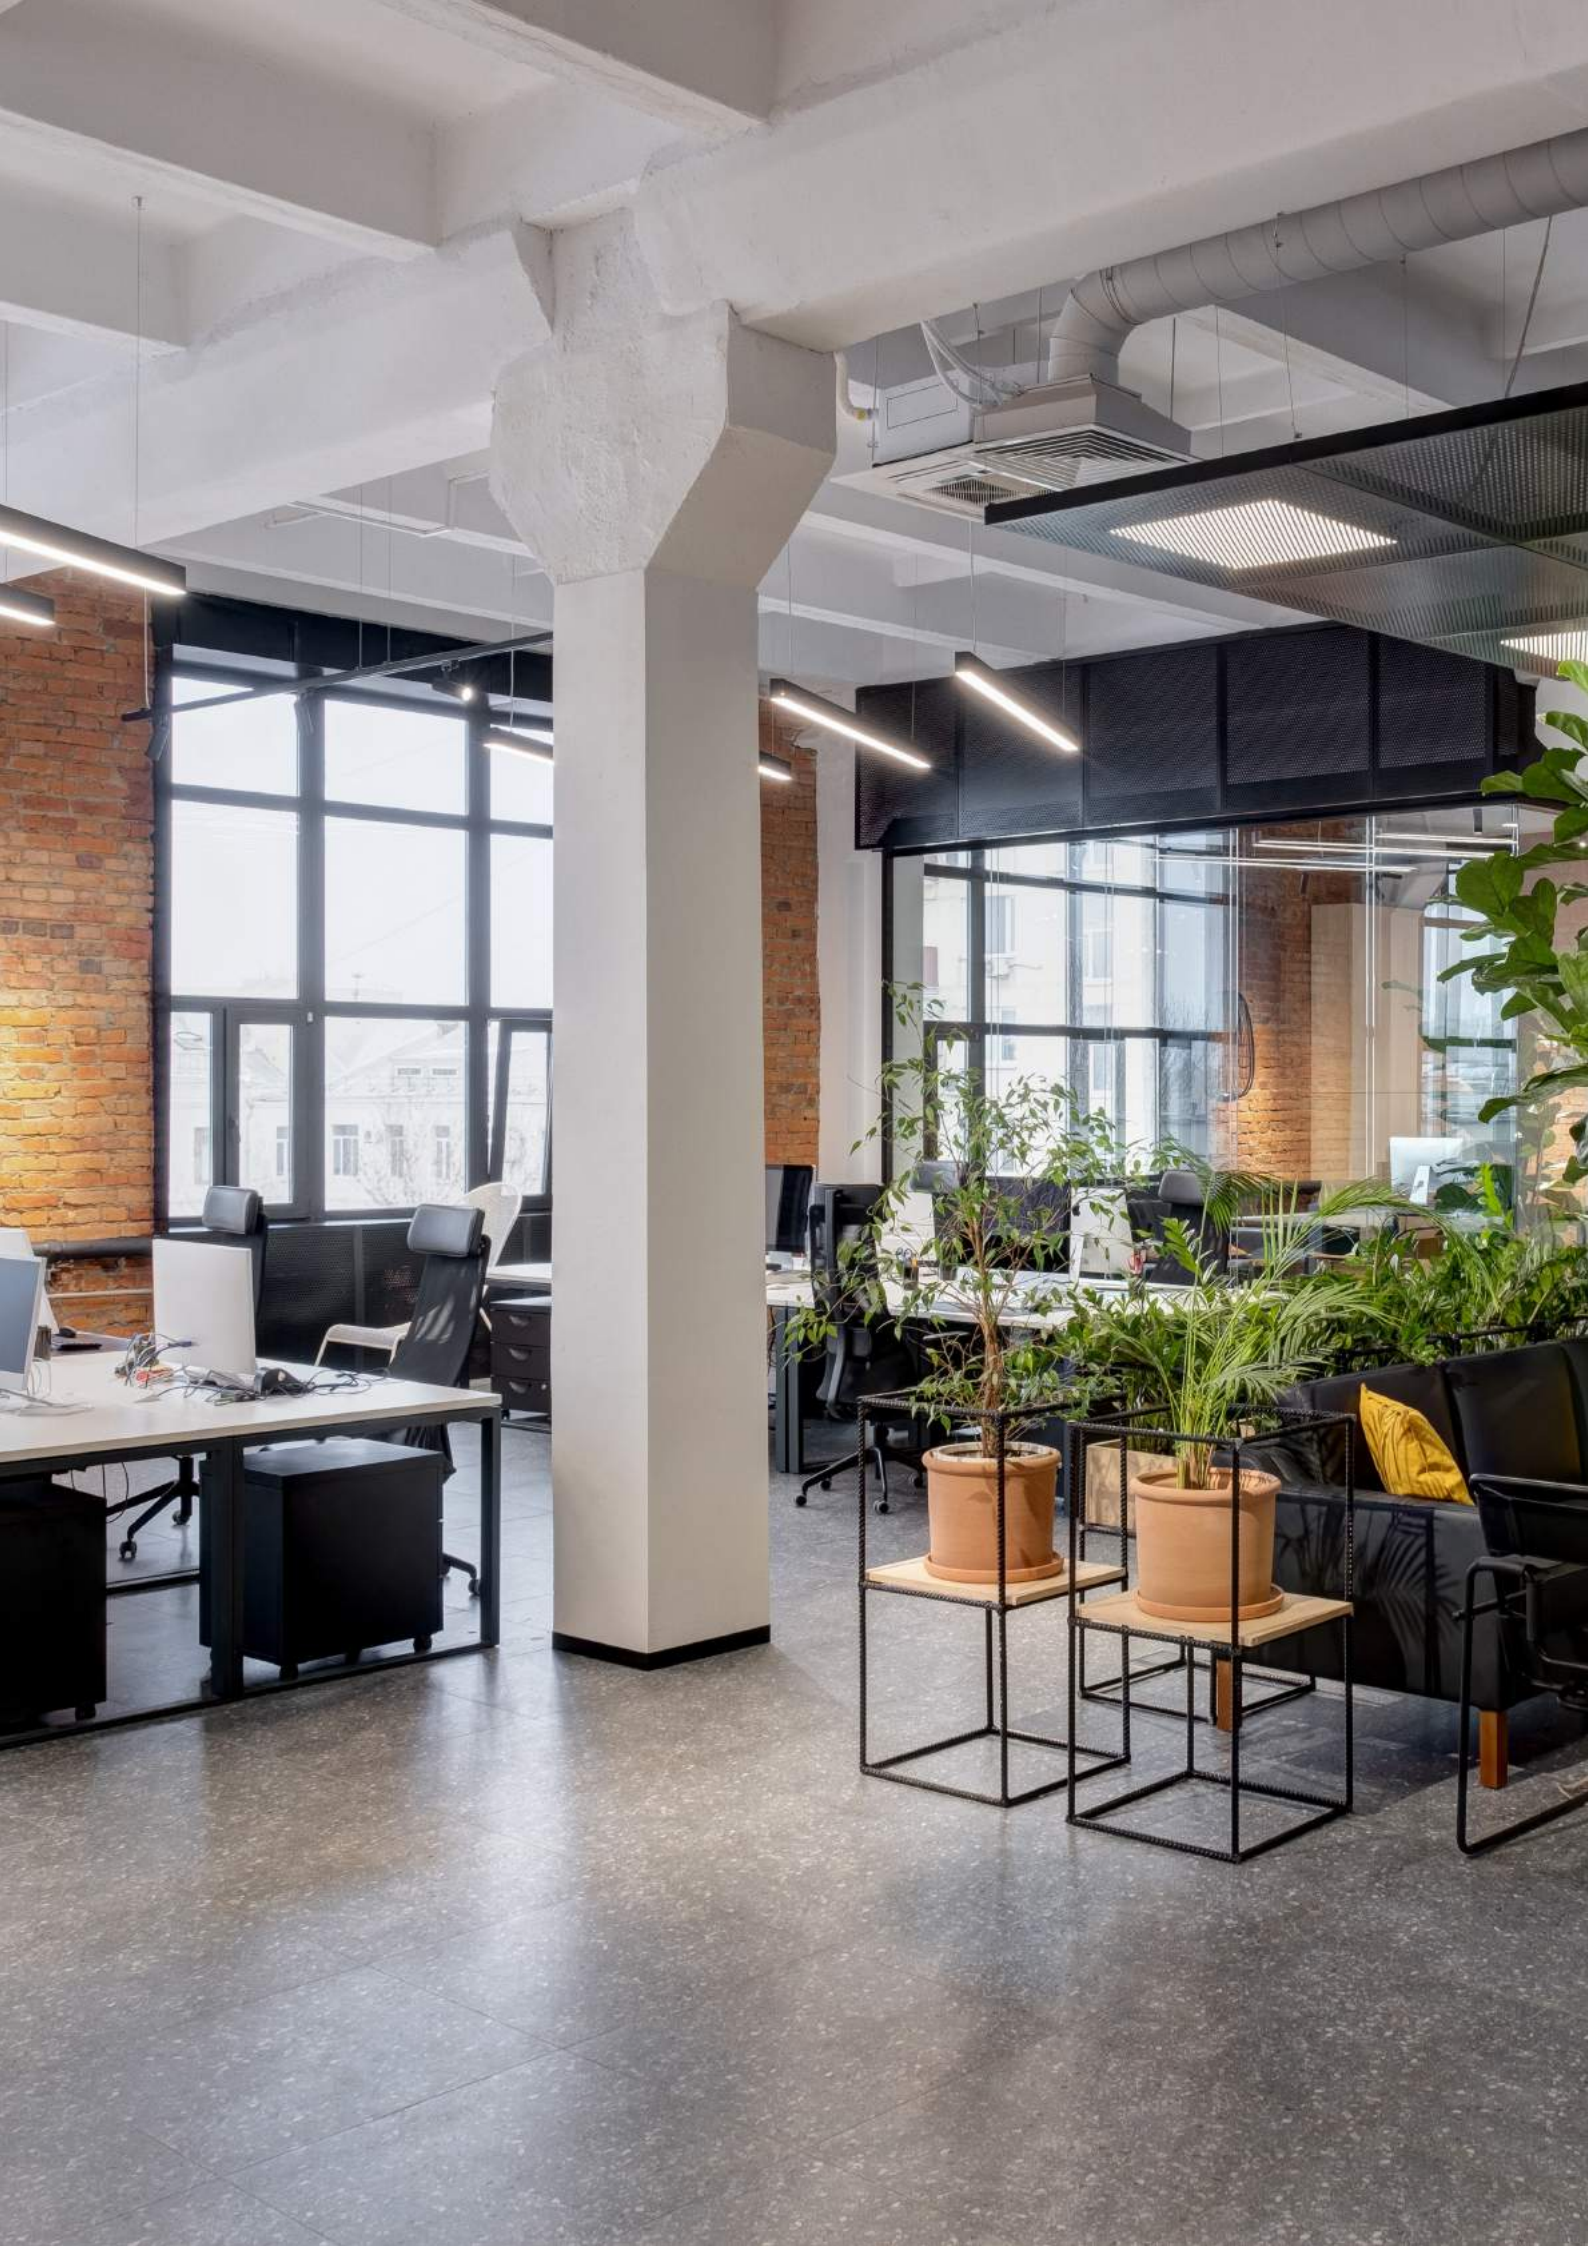



PURE

INNOVATION FOR **LIFE**

07 394 6112

sales@purelighting.co.nz

www.purelighting.co.nz



100% NEW ZEALAND OWNED