


# PURE ELITE BATTEN RANGE


CCT Selectable LED Battens



**40W Elite Batten Light**  
**PL-U120-40W**

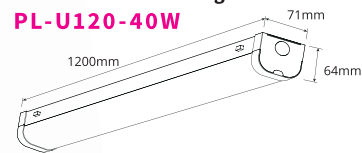

**50W Elite Batten Light**  
**PL-U150-50W**

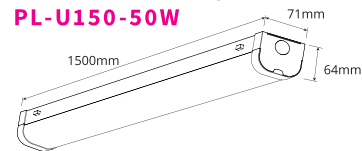




## PRODUCT FEATURES

- Low profile slim batten light
- Metal housing with PC diffuser
- 4 Fast release buttons for easy installation
- CCT selectable 4000K, 6000K
- Emergency option available in 50W see page 87 in PURE Emergency Range

## TECHNICAL SPECIFICATIONS

Emergency Option Available

PRODUCT	Elite Batten		IK RATING	IK08
ORDERING CODE	PL-U120-40W	PL-U150-50W	BEAM ANGLE	120°
POWER	40W	50W	DIMMING	Non-dimmable
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	CCT Switch 4000K, 6000K		POWER FACTOR	0.9
LUMEN OUTPUT	3800-4200lm	5500-6100lm	LED TYPE	SMD
DIMENSIONS	1200 X 71 X 64mm	1500 X 71 X 64mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	  
IP RATING	IP20			

