


## PURE ECO RANGE


Tricolour CCT LED Downlights




**7W ECO Downlight**  
**PLE7WD**

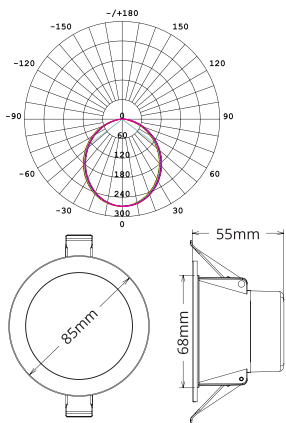

**10W ECO Downlight**  
**PLE10WD**

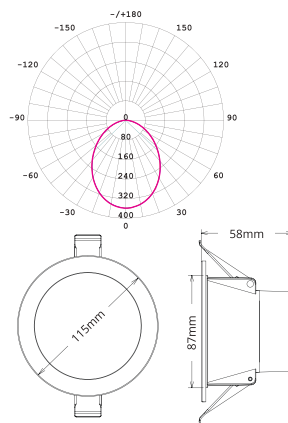

**13W ECO Downlight**  
**PLE13WD**

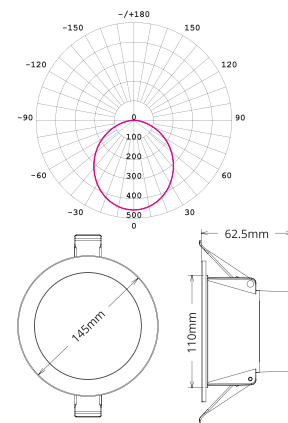

### PRODUCT FEATURES

- Flush low glare diffuser
- Plastic coated aluminium housing with built-in driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable
- Flex and plug

### TECHNICAL SPECIFICATIONS

PRODUCT	PURE ECO Downlight			IK RATING	-
ORDERING CODE	PLE7WD	PLE10WD	PLE13WD	BEAM ANGLE	90°
POWER	7W	10W	13W	DIMMING	Triac Dimming
FITTING COLOUR	White			VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K			POWER FACTOR	0.9
LUMEN OUTPUT	550-620lm	800-880lm	1050-1210lm	LED TYPE	SMD
CUTOUT	Ø70-75mm	Ø90-95mm	Ø120-130mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80			CERTIFICATIONS	
IP RATING	IP54 (front) IP40 (back)				




# PURE ECO RANGE


Tricolour CCT LED Downlights



**16W ECO Downlight**  
**PLE16WD**

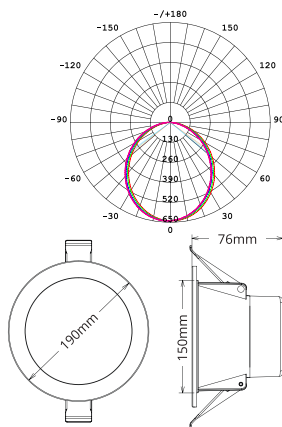

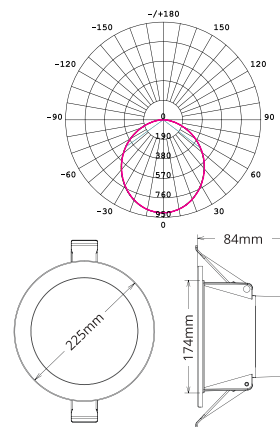


**20W ECO Downlight**  
**PLE20WD**



## PRODUCT FEATURES

- Flush low glare diffuser
- Plastic coated aluminium housing with built-in driver
- IC-F/IC-4 rated covered and abutted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable
- Flex and plug

## TECHNICAL SPECIFICATIONS

PRODUCT	PURE ECO Downlight		IK RATING	-
ORDERING CODE	PLE16WD	PLE20WD	BEAM ANGLE	90°
POWER	16W	20W	DIMMING	Triac Dimming
FITTING COLOUR	White		VOLTAGE	AC220-240V
CCT	CCT Switch 3000K, 4000K, 5700K		POWER FACTOR	0.9
LUMEN OUTPUT	1520-1840lm	1820-2200lm	LED TYPE	SMD
CUTOUT	Ø160-170mm	Ø200-210mm	OPERATING TEMP	-20°~+45°C
CRI	Ra>80		CERTIFICATIONS	  
IP RATING	IP54 (front) IP40 (back)			

