



PURE CEILING LIGHT RANGE



Tricolour CCT LED Oyster Lights

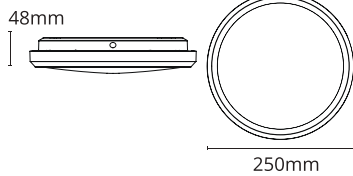



12W Ceiling Light Ø250mm
PLCL12W



18W Ceiling Light Ø300mm
PLCL18W

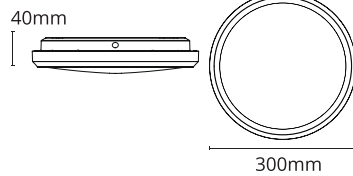

25W Ceiling Light Ø350mm
PLCL25W

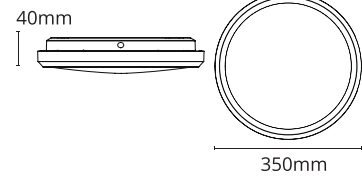

PRODUCT FEATURES

- PC body with PC opal diffuser and internal driver
- Surface mounted
- CCT selectable 3000K, 4000K, 5700K
- Triac dimmable

TECHNICAL SPECIFICATIONS

| | | | | | |
|----------------|--------------------------------|-------------|-------------|----------------|---------------|
| PRODUCT | PURE Ceiling Lights | | | IK RATING | IK10 |
| ORDERING CODE | PLCL12W | PLCL18W | PLCL25W | BEAM ANGLE | 120° |
| POWER | 12W | 18W | 25W | DIMMING | Triac Dimming |
| FITTING COLOUR | White | | | VOLTAGE | AC220-240V |
| CCT | CCT Switch 3000K, 4000K, 5700K | | | POWER FACTOR | 0.9 |
| LUMEN OUTPUT | 1100-1300lm | 1800-2100lm | 2480-2900lm | LED TYPE | SMD |
| DIAMETER | Ø250mm | Ø300mm | Ø350mm | OPERATING TEMP | -20°~+45°C |
| CRI | Ra>80 | | | CERTIFICATIONS | |
| IP RATING | IP54 | | | | |

